

الحمادي للإلكترونيات
ALHAMMADI FOR ELECTRONICS

14.2 mm (0.56 inch) General Purpose Two Digit Seven Segment Displays Technical Data

Categorized for Color

cathode. These gray-faced displays are available in a choice of high efficiency red (HER), green, or yellow colors. The

HDSP-52xE Series
HDSP-52xG Series
HDSP-52xY Series

Devices

Features


- **Industry Standard Size**
- **Industry Standard Pin-Out** 15.24 mm (0.6 in.) DIP Leads on 2.54 mm (0.1 in.) Centers
- **Choice of Colors** Red, Green, Yellow
- **Mitered Font**
Mitered Corners on Segments
- **Gray Face Paint**
Gray Package Gives Optimum Contrast
- **± 50° Viewing Angle**
- **Design Flexibility**
Common Anode or Common Cathode
- **Categorized for Luminous Intensity**
- **Green and Yellow**

Applications

- **Suitable for Indoor Use**
- **Not Recommended for Industrial Applications, i.e. Operating Temperatures Requirements Exceeding 85°C or Below -35°C^[1]**
- **Extreme Temperature Cycling Not Recommended^[2]**

Description

These 14.2 mm (0.56 inch) two digit displays use industry standard size and pin-out. The devices are available as either common anode or common

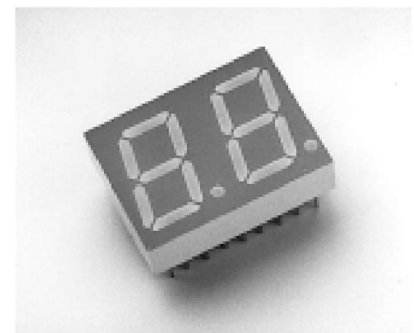

HDSP-521x and HDSP-523x series are suitable for indoor use.

These parts are subjected to Outgoing Quality Assurance (OQA) inspection with AQL of 0.065% for functional and visual/ cosmetic rejects.

HER HDSP-	Green HDSP-	Yellow HDSP-	Description
-----------	-------------	--------------	-------------


521E	521G	521Y	Common Anode Right Hand Decimal
523E	523G	523Y	Common Cathode Right Hand Decimal

Notes:

1. For industrial applications, it is recommended to use HDSP-5521/5523/5621/5623/5721/5723.
2. For details, please contact your local Agilent sales office or an authorized distributor.

Part Numbering System



5082 -X X X X-X X X X X

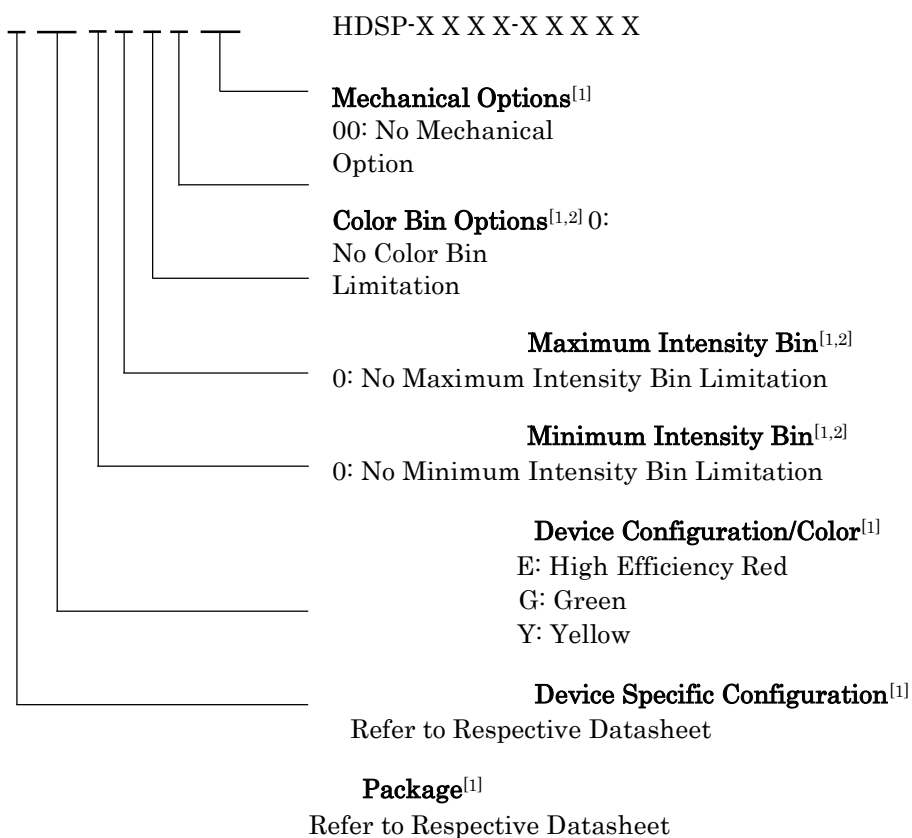**Notes:**


1. For codes not listed in the figure above, please refer to the respective datasheet or contact your nearest Agilent representative for details.
2. Bin options refer to shippable bins for a part number. Color and Intensity Bins are typically restricted to 1 bin per tube (exceptions may apply). Please refer to respective datasheet for specific bin limit information.

Package Dimensions

TOP END VIEW

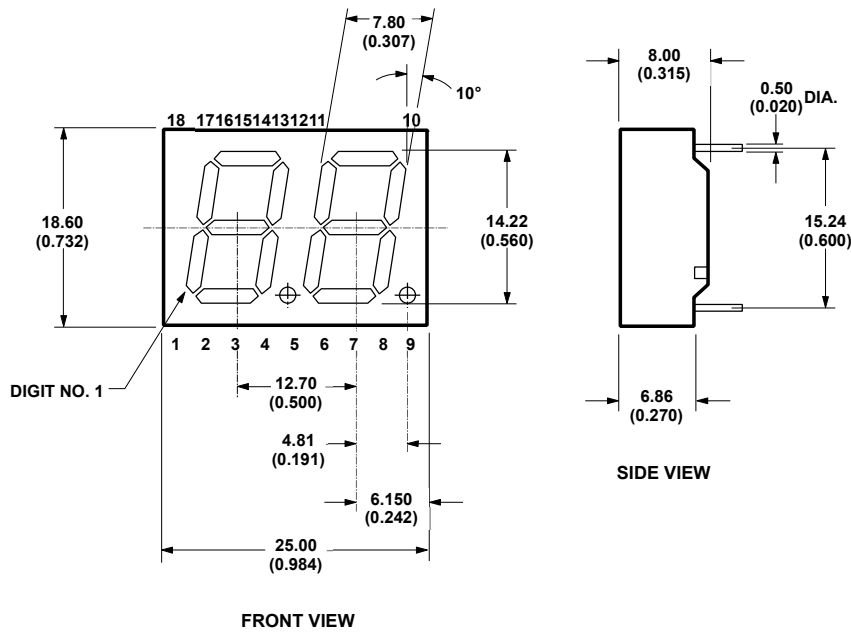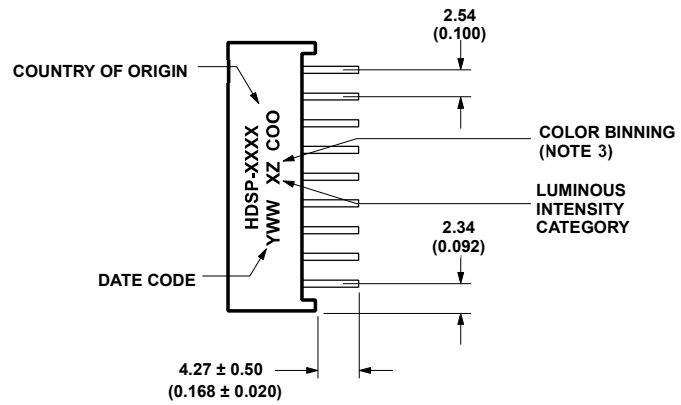

- NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
 2. TOLERANCE IS 0.25 mm (0.01 INCH) UNLESS OTHERWISE STATED.
 3. FOR GREEN AND YELLOW ONLY.

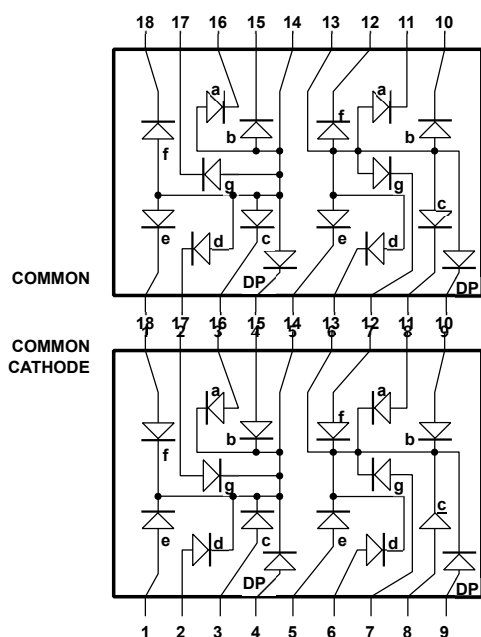

COMMON ANODE		COMMON CATHODE	
PIN	FUNCTION	PIN	FUNCTION
1	E CATHODE NO. 1	1	E ANODE NO. 1
2	D CATHODE NO. 1	2	D ANODE NO. 1
3	C CATHODE NO. 1	3	C ANODE NO. 1
4	DP CATHODE NO. 1	4	DP ANODE NO. 1
5	E CATHODE NO. 2	5	E ANODE NO. 2
6	D CATHODE NO. 2	6	D ANODE NO. 2
7	G CATHODE NO. 2	7	G ANODE NO. 2
8	C CATHODE NO. 2	8	C ANODE NO. 2
9	DP CATHODE NO. 2	9	DP ANODE NO. 2
10	B CATHODE NO. 2	10	B ANODE NO. 2
11	A CATHODE NO. 2	11	A ANODE NO. 2
12	F CATHODE NO. 2	12	F ANODE NO. 2
13	DIGIT NO. 2 ANODE	13	DIGIT NO. 2 CATHODE
14	DIGIT NO. 1 ANODE	14	DIGIT NO. 1 CATHODE
15	B CATHODE NO. 1	15	B ANODE NO. 1
16	A CATHODE NO. 1	16	A ANODE NO. 1
17	G CATHODE NO. 1	17	G ANODE NO. 1
18	F CATHODE NO. 1	18	F ANODE NO. 1

Internal
Circuit
Diagram

Absolute

Maximum Ratings at $T_A=25^\circ\text{C}$

Parameter	HER	Green	Yellow	Units
	HDSP-521E HDSP-523E	HDSP-521G HDSP-523G	HDSP-521Y HDSP-523Y	
Average Power per Segment or DP	62.5	105	45	mW
Peak Forward Current per Segment or DP (1/10 Duty Cycle, 0.1 ms Pulse Width)	90	90	60	mA
DC Forward Current per Segment or DP ^[1]	25 ^[1]	30 ^[3]	20 ^[2]	mA
Reverse Voltage per Segment or DP	5	5	5	V
Operating Temperature	-35 to +85	-35 to +85	-35 to +85	$^\circ\text{C}$
Storage Temperature	-35 to +85	-35 to +85	-35 to +85	$^\circ\text{C}$
Wave Soldering Temperature for 3 seconds ^[4] (2 mm [0.063 in.] below Body)	250	250	250	$^\circ\text{C}$

Notes:

- Derate above 25°C at $0.33\text{ mA}/^\circ\text{C}$.
- Derate above 25°C at $0.27\text{ mA}/^\circ\text{C}$.
- Derate above 40 celcius at $0.35\text{ mA}/\text{celcius}$.
- Not recommended to be soldered more than 2 times. Minimum interval between solderings is 15 minutes. Total soldering time notto exceed 5 seconds.

Optical/Electrical Characteristics at $T_A=25^\circ\text{C}$ High Efficiency Red

Devices	Parameter	Symbol	Min.	Typ.	Max.	Units	Test
HDSP-							Conditions

521E 523E	Luminous Intensity/Segment (Segment Average) ^[1,2]	I _v	2.28	4.00	7.69	mcd	I _F = 10 mA
	Forward Voltage/Segment or DP	V _F		2.05	2.60	V	I _F = 20 mA
	Peak Wavelength	PEAK		640		nm	
	Dominant Wavelength ^[3]	λ		628		nm	I _F = 10 mA
	Reverse Voltage/Segment or DP ^[4]	V _R	5.0			V	I _R = 100 μA
	Temperature Coefficient of V _F /Segment or DP	V _F /°C			-2		mV/°C

Green

Devices							Test
HDSP-	Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
521G 523G	Luminous Intensity/Segment (Segment Average) ^[1,2]	I _v	2.28	3.50	5.13	mcd	I _F = 10 mA
	Forward Voltage/Segment or DP	V _F		2.0	2.4	V	I _F = 10 mA
	Peak Wavelength	PEAK		568		nm	
	Dominant Wavelength ^[3]	λ	564.5	570	576.5	nm	I _F = 10 mA
	Reverse Voltage/Segment or DP ^[4]	V _R	5.0			V	I _R = 100 μA
	Temperature Coefficient of V _F /Segment or DP	V _F /°C			-2		mV/°C

Yellow

Devices							Test
HDSP-	Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
521Y 523Y	Luminous Intensity/Segment (Segment Average) ^[1,2]	I _v	1.52	2.30	5.13	mcd	I _F = 10 mA
	Forward Voltage/Segment or DP	V _F		2.1	2.4	V	I _F = 20 mA
	Peak Wavelength	PEAK		589		nm	
	Dominant Wavelength ^[3]	λ	582.0	587	592.0	nm	I _F = 10 mA
	Reverse Voltage/Segment or DP ^[4]	V _R	5.0			V	I _R = 100 μA
	Temperature Coefficient of V _F /Segment or DP	V _F /°C			-2		mV/°C

Notes:

1. Case temperature of the device immediately prior to the intensity measurement is 25°C.
2. The digits are categorized for luminous intensity. The intensity category is designated by a letter on the side of the package.

3. The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
4. Typical specification for reference only. Do not exceed absolute maximum ratings.

Intensity Bin Limits^[1] (mcd at 10 mA)

Bin Name	Yel low		GR EEN		H IR	
	Min. ^[2]	Max. ^[2]	Min. ^[2]	Max. ^[2]	Min. ^[2]	Max. ^[2]
F	1.52	2.28	NA	NA	NA	NA
G	2.28	3.42	2.28	3.42	2.28	3.42
H	3.42	5.13	3.42	5.13	3.42	5.13
I	NA	NA	NA	NA	5.13	7.69

Notes:

- Bin categories are established for classification of products. Products may not be available in all bin categories.
- Tolerance for each bin limit is $\pm 10\%$.

Color Categories (Dominant Wavelength)

Bin Name	GR EEN	
	Min. ^[2]	Max. ^[2]
3	570.5	573.5
2	573.5	576.5
Bin Name	YEL OW	
	Min. ^[2]	Max. ^[2]
2	587.00	589.50
3	584.50	587.00

Notes:

- Bin categories are established for classification of products. Products may not be available in all bin categories.
- Tolerance for each bin limit is ± 1 nm.

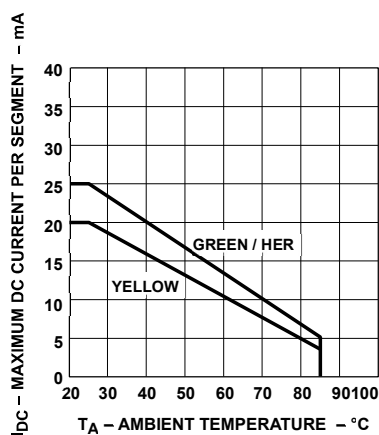


Figure 1. Maximum Allowable DC

Current vs. Ambient Temperature.

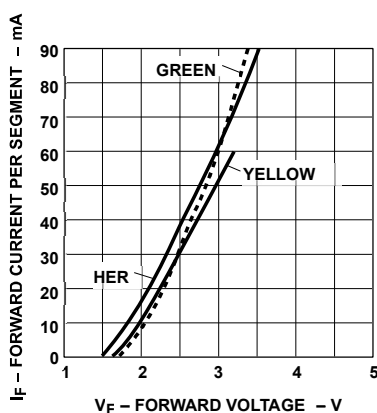


Figure 2. Forward Current vs.

Forward Voltage.

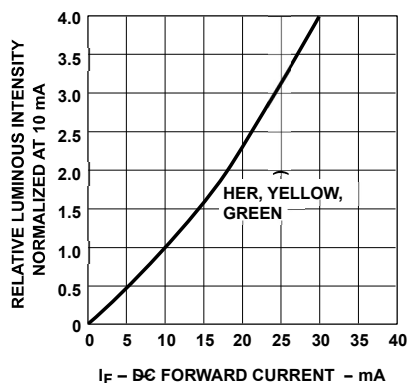


Figure 3. Relative Luminous Intensity (Luminous vs. DC Forward Current. Intensity per Unit Current)

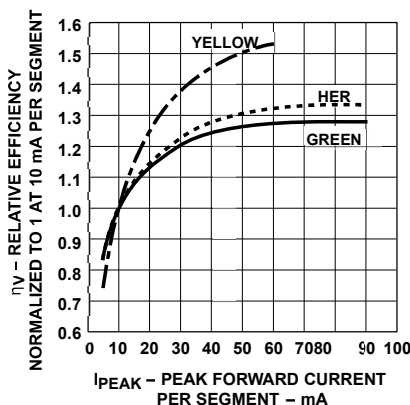


Figure 4. Relative Efficiency (Luminous vs. DC Forward Current. Intensity per Unit Current) vs. Peak Current.

Contrast Enhancement

For information on contrast enhancement, please see Application Note 1015.

Soldering/Cleaning

Cleaning agents from the ketone family (acetone, methyl ethyl ketone, etc.) and from the chlorinated hydrocarbon family (methylene chloride, trichloro

ethylene, carbon tetrachloride, etc.) are not recommended for cleaning LED parts. All of these various solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.

For information on soldering LEDs please refer to Application Note 1027.

Device Reliability

For reliability information, please see the reliability data sheet 14.2 mm (0.56 inch) General Purpose Two Digit Seven Segment Display.



www.agilent.com/semiconductor

S

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or (916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152
(Domestic/International), or 0120-61-1280
(Domestic Only) Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

Obsoletes 5988-0376EN

July 17, 2004 5988-

5378EN



EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[HDSP-521G](#)

[HDSP-523G](#)

[HDSP-521G](#)

EN
This Datasheet is presented by
the manufacturer

DE
Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR
Cette fiche technique est
présentée par le fabricant