

الحمادي للإلكترونيات
ALHAMMADI FOR ELECTRONICS

Panasonic

ideas for life



FEATURES

Ideal for power supply
1a/1c/2a/2c/5A/10A
power relays

JW
RELAYS

- Miniature package with universal terminal footprint
- High dielectric withstanding for transient protection:
10,000 V surge in μ s between coil and contact
- Sealed construction
- Class B coil insulation types available
- TV rated (TV-5) types available (only for 1 Form A type)
- VDE, TÜV, SEMKO, SEV, FIMKO, TV-5 also approved
- Sockets are available.

RoHS compliant

TYPICAL APPLICATIONS

1. Home appliances


TV sets, VCR, Microwave ovens

2. Office machines

Photocopiers, Vending machines

3. Industrial equipment

ORDERING INFORMATION

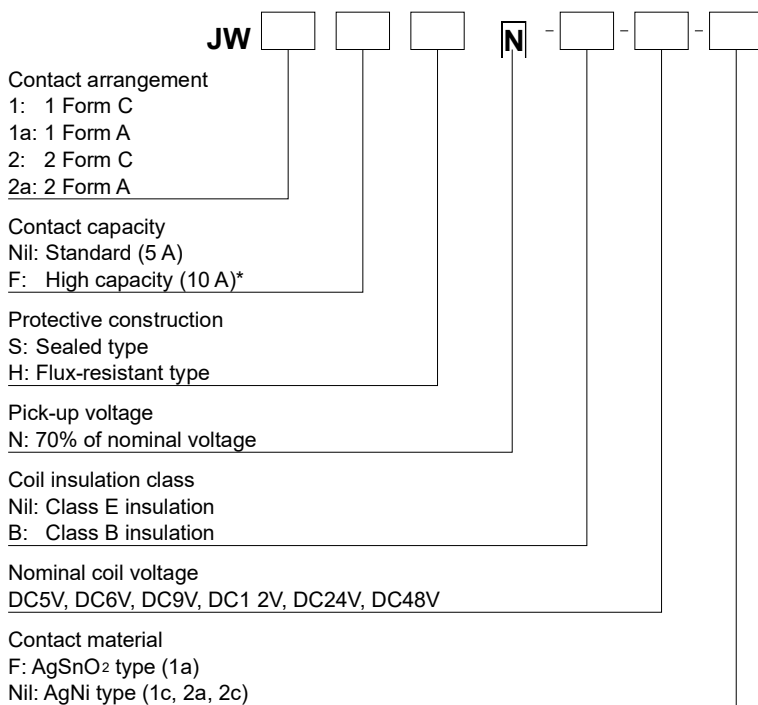

*Only for 1 Form A and 1 Form C type

Certified by UL, CSA, VDE, SEMKO, FIMKO and SEV

Note: When ordering TV rated (TV-5) types, add suffix-TV (available only for 1 Form A type).

TYPES

1) 1 Form A Standard (5A) type

Nominal coil voltage 5V DC 6V DC 9V DC 12V DC 24V DC 48V DC	Sealed type
	Part No.
	JW1aSN-DC5V-F
	JW1aSN-DC6V-F
	JW1aSN-DC9V-F
	JW1aSN-DC12V-F
	JW1aSN-DC24V-F
	JW1aSN-DC48V-F

Standard packing: Carton 100 pcs. Case 500 pcs.

Flux-resistant type

Part No.
JW1aHN-DC5V-F
JW1aHN-DC6V-F
JW1aHN-DC9V-F
JW1aHN-DC12V-F
JW1aHN-DC24V-F
JW1aHN-DC48V-F

2) 1 Form A High capacity (10 A) type

Flux-resistant type Part No.

Nominal coil voltage	Sealed type	Part No.
	Part No.	
5V DC	JW1aFHN-DC5V-F	JW1aFHN-DC5V-F
6V DC	JW1aFHN-DC6V-F	JW1aFHN-DC6V-F
9V DC	JW1aFHN-DC9V-F	JW1aFHN-DC9V-F
12V DC	JW1aFHN-DC12V-F	JW1aFHN-DC12V-F
24V DC	JW1aFHN-DC24V-F	JW1aFHN-DC24V-F
48V DC	JW1aFHN-DC48V-F	JW1aFHN-DC48V-F

Standard packing: Carton 100 pcs. Case 500 pcs.

4) 1 Form C High capacity (10 A) type

Flux-resistant type Part No.

3) 1 Form C Standard (5A) type

Nominal coil voltage 5V DC 6V DC 9V DC 12V DC 24V DC 48V DC	Sealed type
	Part No.
	JW1SN-DC5V
	JW1SN-DC6V
	JW1SN-DC9V
	JW1SN-DC12V
	JW1SN-DC24V
	JW1SN-DC48V

Standard packing: Carton 100 pcs. Case 500 pcs.

Flux-resistant type

Part No.
JW1HN-DC5V
JW1HN-DC6V
JW1HN-DC9V
JW1HN-DC12V
JW1HN-DC24V
JW1HN-DC48V

Nominal coil voltage	Sealed type	Part No.
	Part No.	
5V DC	JW1FHN-DC5V	JW1FHN-DC5V
6V DC	JW1FHN-DC6V	JW1FHN-DC6V
9V DC	JW1FHN-DC9V	JW1FHN-DC9V
12V DC	JW1FHN-DC12V	JW1FHN-DC12V
24V DC	JW1FHN-DC24V	JW1FHN-DC24V
48V DC	JW1FHN-DC48V	JW1FHN-DC48V

Standard packing: Carton 100 pcs. Case 500 pcs.

6) 2 Form C Standard (5A) type

Flux-resistant type Part No.

5) 2 Form A Standard (5A) type

Nominal coil voltage 5V DC 6V DC 9V DC 12V DC 24V DC 48V DC	Sealed type
	Part No.
	JW2aSN-DC5V
	JW2aSN-DC6V
	JW2aSN-DC9V
	JW2aSN-DC12V
	JW2aSN-DC24V
	JW2aSN-DC48V

Standard packing: Carton 100 pcs. Case 500 pcs.

Flux-resistant type

Part No.
JW2aHN-DC5V
JW2aHN-DC6V
JW2aHN-DC9V
JW2aHN-DC12V
JW2aHN-DC24V
JW2aHN-DC48V

Nominal coil voltage	Sealed type	Part No.
	Part No.	
5V DC	JW2FHN-DC5V	JW2FHN-DC5V
6V DC	JW2FHN-DC6V	JW2FHN-DC6V
9V DC	JW2FHN-DC9V	JW2FHN-DC9V
12V DC	JW2FHN-DC12V	JW2FHN-DC12V
24V DC	JW2FHN-DC24V	JW2FHN-DC24V
48V DC	JW2FHN-DC48V	JW2FHN-DC48V

Standard packing: Carton 100 pcs. Case 500 pcs.
Note: Class B coil insulation type is available.
Ex) JW1aSN-B-DC12V-F

* For sockets, see page 140.

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
5V DC	70%V or less of nominal voltage (Initial)	10%V or more of nominal voltage (Initial)	106mA	47Ω	530mW	130%V of nominal voltage (at 60°C 140°F) 120%V of nominal voltage (at 85°C 185°F)*4
6V DC			88mA	68Ω		
9V DC			58mA	155Ω		
12V DC			44mA	270Ω		
24V DC			22mA	1,100Ω		
48V DC			11mA	4,400Ω		

RATING

1. Coil data

Specifications

Characteristics	Item	Specifications	
		Standard type	High capacity type
Contact	Contact material	Form A: AgSnO ₂ type Form C, 2 Form A and 2 Form C: AgNi type	
	Arrangement	Form A, 1 Form C, 2 Form A and 2 Form C	Form A and 1 Form C
	Contact resistance (Initial)	Max. 100 mΩ (By voltage drop 6 V DC 1A)	
Rating	Nominal switching capacity (resistive load)	5A 250V AC, 5A 30V DC	10A 250V AC, 10A 30V DC
	Max. switching power (resistive load)	1,250VA, 150W	2,500VA, 300W
	Max. switching voltage	250V AC, 30V DC	
	Max. switching current	5A	10A
	Min. switching capacity (reference value)* ¹	100mA, 5V DC	
Electrical characteristics	Insulation resistance (Initial)	Min. 1,000MΩ (at 500V DC) Measurement at same location as "Breakdown voltage" section.	
	Breakdown voltage (Initial)	Between open contacts	1,000 Vrms for 1 min. (Detection current: 10 mA)
		Between contact and coil	5,000 Vrms for 1 min. (Detection current: 10 mA)
		Between contact sets	3,000 Vrms for 1 min. (2 Form A, 2 Form C) (Detection current: 10 mA)
	Temperature rise (coil)	Form A: Max. 45°C 113°F, Form C, 2 Form A and 2 Form C: Max. 55°C 131°F (resistive method, with nominal coil voltage and at nominal switching capacity, at 20°C 68°F)	Form A: Max. 45°C 113°F, Form C: Max. 55°C 131°F (resistive method, with nominal coil voltage and at nominal switching capacity, at 20°C 68°F)
	Surge breakdown voltage* ² (Between contact and coil) (Initial)	10,000 V	
	Operate time (at nominal voltage) (at 20°C 68°F)	Max. 15 ms (excluding contact bounce time.)	
Release time (at nominal voltage) (at 20°C 68°F)	Max. 5 ms (excluding contact bounce time) (Without diode)		
Mechanical characteristics	Shock resistance	Functional	m/s ² (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)
		Destructive	m/s ² (Half-wave pulse of sine wave: 6 ms.)
	Vibration resistance	Functional	to 55 Hz at double amplitude of 1.6 mm (Detection time: 10μs.)
		Destructive	to 55 Hz at double amplitude of 2.0 mm
Expected life	Mechanical (at 180 times/min.)	Min. 5×10 ⁶	
	Electrical (at 6 times/min.)	Min. 10 ⁵ (at resistive load)	
Conditions	Conditions for operation, transport and storage* ³	Ambient temperature* ⁴ : -40°C to +60°C -40°F to 140°F (Class E), (Class B: -40°C to +85°C -40°F to 185°F) Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)	
	Max. operating speed (at nominal switching capacity)	Flux-resistant type: 20 times/min., Sealed type: 6 times/min.	
Unit weight		Approx. 13 g .46 oz	

* Specifications will vary with foreign standards certification ratings.

Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981

*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.

*4. The pick-up and drop out voltages rise approximately 0.4% for every 1°C 33.8°F given a standard ambient temperature of 20°C 68°F. Therefore, when using relays where the ambient temperature is high, please take into consideration the rise in pick-up and drop out voltages and keep the coil applied voltage within the maximum applied voltage.


REFERENCE DATA

JW 1 Form A Standard (5A) type

1. Maximum operating power

JW 1 Form A High Capacity (10 A) type

1. Maximum operating power

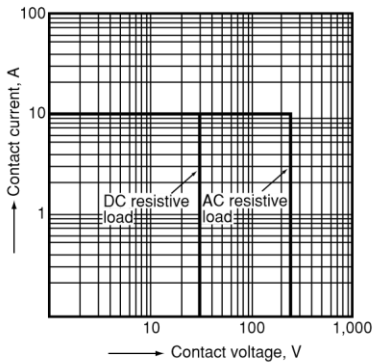


2. Operate/release time

2. Operate/release time

Sample: JW1aFSN-DC12V, 10 pcs.


Ambient temperature: 20°C 68°F

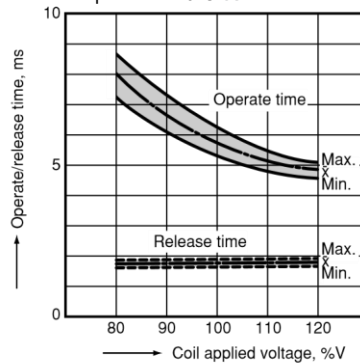

3. Life curve

1 Form A Standard (5 A) type

3. Life curve

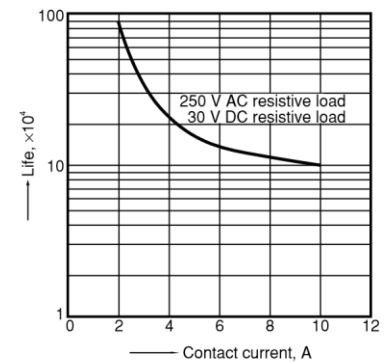


4-(1). Coil temperature rise

(Contact carrying current: 5A)

Sample JW1aFSN-DC12V-F, 6 pcs.

Point measured: Inside the coil

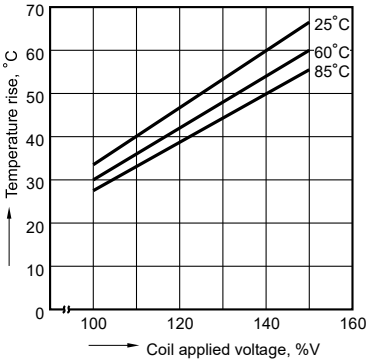


4-(2). Coil temperature rise

(Contact carrying current: 10 A)

Sample: JW1aFSN-DC12V-F, 6

pcs. Point measured: Inside the coil

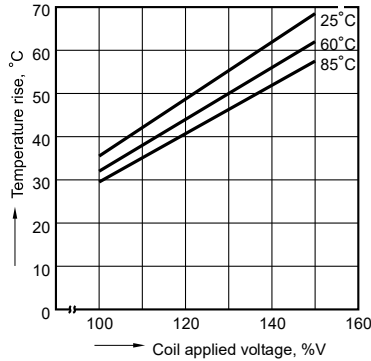


JW 1 Form C Standard (5 A) type


1-(3). Maximum operating power

Sample: JW1SN-DC12V-F, 6 pcs.

Ambient temperature: 20°C 68°F

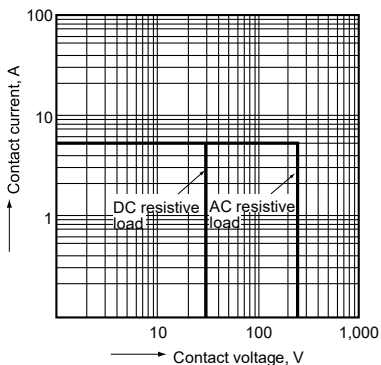





2. Operate/release time

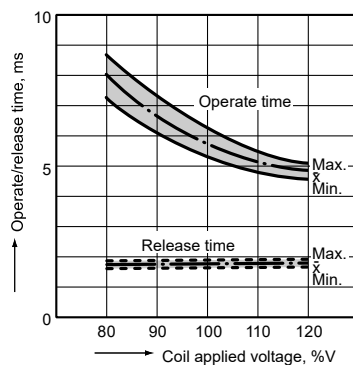

JW 1 Form C High Capacity (10 A) type


1. Maximum operating power

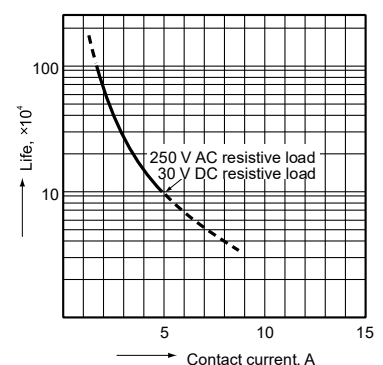

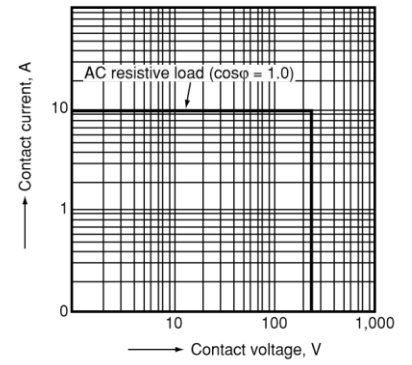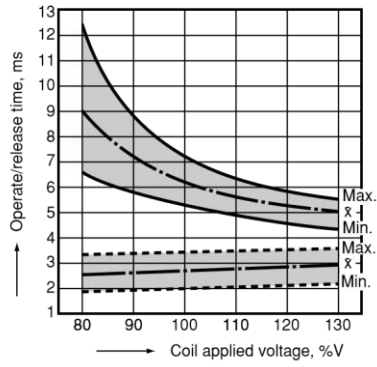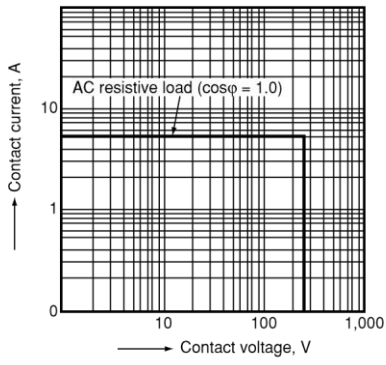

JW 2 Form A Standard (5 A) type


1. Maximum operating power

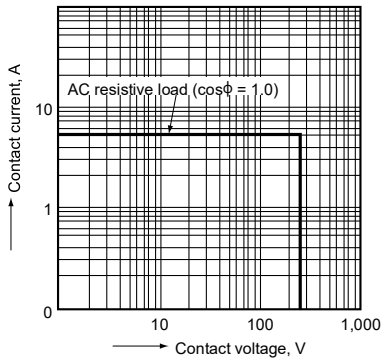

2. Operate/release time

Sample: JW2aSN-DC24V-F, 6 pcs.

Ambient temperature: 20°C 68°F

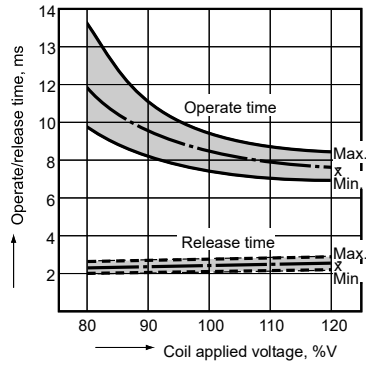



JW 2 Form C Standard (5 A) type

1. Maximum operating power

2. Operate/release time

Sample: JW2SN-DC12V-F, 6 pcs.

Ambient temperature: 20°C 68°F

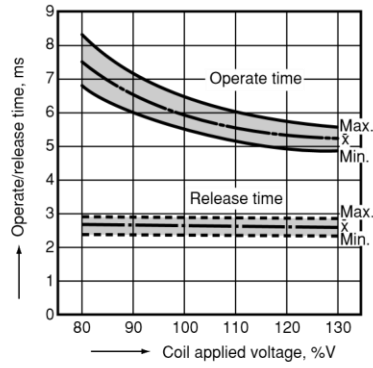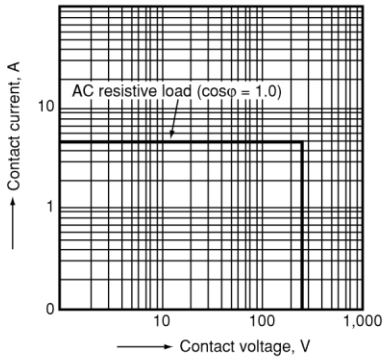

DIMENSIONS (mm inch)


JW 1 Form A

CAD Data





The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>


External dimensions

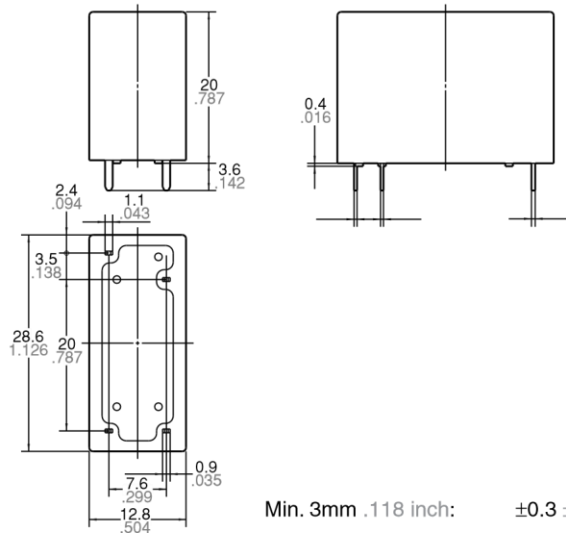

Wiring diagram (Bottom view)



Note: Terminal numbers are not indicated on the relay.

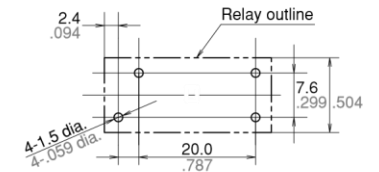

Tolerance: $\pm 0.1 \pm .004$

PC board pattern (Bottom view)

Dimension: _____ General tolerance

Less than 1mm .039inch: $\pm 0.1 \pm .004$

Min. 1mm .039inch $_{.008}^{.138}$ 3.5 less than 3mm .118 inch: ± 0.2

	File No.	Contact rating	File No.	Contact rating	File No.	Contact rating	File No.	Rating	File No.	Rating	File No.	Contact rating	File No.	Contact rating	File No.	Contact rating
Standard type 1 Form A	E43028	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC	LR26550 etc.	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	40013854	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) Standard type 5A 30V DC (0ms)	UL E43028 CSA LR26550 etc.	1a→TV-5	B 11 05 13461 305	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817817	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	24965	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	11. 0262	5A 250V AC (cosφ=1.0)
Standard type 1 Form C	E43028	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC	LR26550 etc.	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	40013854	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) Standard type 5A 30V DC (0ms)	—	—	B 11 05 13461 305	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817817	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	24965	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	11. 0262	5A 250V AC (cosφ=1.0)
Standard type 2 Form A	E43028	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	LR26550 etc.	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	40013854	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) Standard type 5A 30V DC (0ms)	—	—	B 11 05 13461 305	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817817	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	24965	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	11. 0262	5A 250V AC (cosφ=1.0)
Standard type 2 Form C	E43028	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	LR26550 etc.	5A 277V AC 5A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	40013854	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) Standard type 5A 30V DC (0ms)	—	—	B 11 05 13461 305	5A 250V AC (cosφ=1.0) 3A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817817	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	24965	5A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	11. 0262	5A 250V AC (cosφ=1.0)
High capacity type 1 Form A	E43028	10A 277V AC 10A 30V DC 1/2HP 125V AC 1/2HP 250V AC	LR26550 etc.	10A 277V AC 10A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	40013854	10A 250V AC (cosφ=1.0) 7A 250V AC (cosφ=0.4) High capacity type 10A 30V DC (0ms)	UL E43028 CSA LR26550	1a→TV-5	B 11 05 13461 305	10A 250V AC (cosφ=1.0) 7A 250V AC (cosφ=0.4) 10A 30V DC (0ms)	817817	10A 250V AC (cosφ=1.0) 10A 30V DC (0ms)	24965	10A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	11. 0262	10A 250V AC (cosφ=1.0)
High capacity type 1 Form C	E43028	10A 277V AC 10A 30V DC 1/2HP 125V AC 1/2HP 250V AC	LR26550 etc.	10A 277V AC 10A 30V DC 1/2HP 125V AC 1/2HP 250V AC B300	40013854	10A 250V AC (cosφ=1.0) 7A 250V AC (cosφ=0.4) High capacity type 10A 30V DC (0ms)	—	—	B 11 05 13461 305	10A 250V AC (cosφ=1.0) 7A 250V AC (cosφ=0.4) 10A 30V DC (0ms)	817817	10A 250V AC (cosφ=1.0) 10A 30V DC (0ms)	24965	10A 250V AC (cosφ=1.0) 5A 30V DC (0ms)	11. 0262	10A 250V AC (cosφ=1.0)