


General Purpose Relay

- Designed small, 2- and 3-pole types break 5 A loads and 4-pole type, 3 A load
- High reliability, long life
- Ultra-high sensitivity with quick response
- High vibration/shock resistance
- 3- and 4-pole types have an arc barrier
- UL and CSA approved
- Withstands dielectric strength of 2,000 V
- Relays with high-capacity, LED indicator, diode surge suppression, push-to-test button, or RC circuit are available
- Changes due to aging are negligible because of use of special magnetic materials, thus ensuring long continuous holding time
- Little change in characteristics such as contact follow, contact pressure, etc., throughout long life

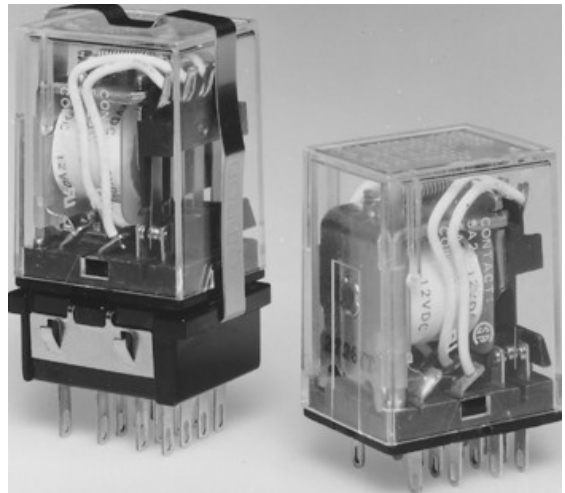

Ordering Information

To Order: Select the part number and add the desired coil voltage rating (e.g., MY4-DC6).

Type	Terminal	Contact form	Construction	Part number					
				Single contact			Bifurcated contact		
				Standard bracket mounting	Upper mounting bracket	Lower mounting bracket	Standard bracket mounting	Upper mounting bracket	Lower mounting bracket
Standard	Plug-in/solder	DPDT 3PDT 4PDT	Unsealed	MY2	MY2F	MY2S	MY2Z	MY2ZF	MY2ZS
				MY3	MY3F	MY3S	—	—	—
				MY4	MY4F	MY4S	MY4Z	MY4ZF	MY4ZS
	MY2-02	—		—	MY2Z-02	—	—		
	MY3-02	—		—	—	—	—		
	MY4-02	—		—	MY2Z-02	—	—		
	PCB	DPDT 3PDT 4PDT							

Plug-in/solder PCB	4PDT	Sealed	MYQ4	—	—	MYQ4Z	—	—
	4PDT		MYQ4-02	—	—	MYQ4Z-02	—	—
Plug-in/solder PCB	4PDT	Hermetically Sealed	MY4H	—	—	MY4ZH	—	—
	4PDT		MY4H-0	—	—	MY4ZH-0	—	—

- Note: 1. For SEV approved type, order the following: MY4-SV-DC6. (Lloyd's Register approval. See "Approvals" section.)
2. To order connecting sockets and mounting tracks, see "Accessories" section.
3. AgCdO contacts are also available (MY2E, MY3E, MY4E). Contact your OMRON sales representative for details.

Ordering information (continued)

Type	Terminal	Contact form	Construction	Part number					
				Single contact			Bifurcated contact		
				Standard mounting	Upper mounting bracket	Lower mounting bracket	Standard mounting	Upper mounting bracket	Lower mounting bracket
LED indicator	Plug-in/solder	DPDT 3PDT 4PDT		MY2N	—	—	MY2ZN	—	—
				MY3N	—	—	—	—	—
				MY4N	—	—	MY4ZN	—	—
High-capacity		DPDT	w/o LED indicator	MY2-Y	—	—	—	—	—
			LED indicator	MY2N-Y	—	—	—	—	—
Diode surge suppression*		DPDT 3PDT 4PDT		MY2-D	—	—	MY2Z-D	—	—
				MY3-D	—	—	—	—	—
				MY4-D	—	—	MY4Z-D	—	—
LED indicator and diode surge suppression*		DPDT 3PDT 4PDT		MY2N-D2	—	—	MY2ZN-D2	—	—
				MY3N-D2	—	—	—	—	—
				MY4N-D2	—	—	MY4ZN-D2	—	—
RC circuit**		DPDT 3PDT 4PDT	w/o LED indicator	MY2-CR	—	—	MY2Z-CR	—	—
				MY3-CR	—	—	—	—	—
				MY4-CR	—	—	MY4Z-CR	—	—
		DPDT 4PDT	LED indicator	MY2N-CR	—	—	—	—	—
				MY4N-CR	—	—	—	—	—
Push-to-test button		DPDT 4PDT		MY214	—	—	MY2Z12	—	—
				MY414	—	—	MY4Z12	—	—
LED indicator and RC circuit		DPDT 4PDT		MY214N	—	—	MY2Z12N	—	—
				MY414N	—	—	MY4Z12N	—	—
Type	Terminal	Contact form		Part number					
Latching	Plug-in PC board	DPDT		MY2K-US					
				MY2K-02-US					

- Note: 1. For SEV approved type, order as the following: MY4-SV-DC6. (Lloyd's Register approval. See "Approvals" section.)
2. To order connecting sockets and mounting tracks, see "Accessories" section.
3. AgCdO contacts are also available. Contact your OMRON sales representative for details.
4. * DC coils only** AC coils only

■ ACCESSORIES

Connecting Sockets

To Order: Select the appropriate part numbers for sockets, clips, and mounting tracks (if required) from the available types chart.

Available Types Track mounted sockets

Relay	Socket*	Relay hold-down clip		Mounting track
		Standard	RC circuit	

DPDT	PYF08A-E	PYC-A1	Y92-H3	PFP-100N/PFP-50N & PFP-M or PFP-100N2 PFP-S (Optional spacer)
3PDT	PYF11A			
4PDT	PYF14A-E			

* Track mounted socket can be used as a front connecting socket.

Back connecting sockets

Relay	Solder terminal socket	Wire wrap terminal socket	Relay hold-down clip				Socket Mounting Plate		
			Standard	Push-to-test	RC circuit	Mtg. plate	1	18	36
DPDT	PY08	PY08QN	PYC-P	PYC-P2	PYC-1	PYC-S	PYP-1	PYP-18	PYP-36
3PDT	PY11	PY11QN							
4PDT	PY14	PY14QN							

Note: Types PYP-18, PTP-12 and PTP-10 may be cut to any desired length.

Relay	PC terminal socket	Relay hold-down clip		
		Standard	Push-to-test	RC circuit
DPDT	PY08-02	PYC-P	PYC-P2	PYC-1
3PDT	PY11-02			
4PDT	PY14-02			

Specifications

■ CONTACT DATA

Non-latching – Unsealed

Load	DPDT, 3PDT		4DPT		High-capacity	
	Resistive load (p.f. = 1)	Inductive load (p.f. = 0.4) (L/R = 7 ms)	Resistive load (p.f. = 1)	Inductive load (p.f. = 0.4) (L/R = 7 ms)	Resistive load (p.f. = 1)	Inductive load (p.f. = 0.4) (L/R = 7 ms)
Rated load	5 A at 220 VAC 5 A at 24 VDC	2 A at 220 VAC 2 A at 24 VDC	3 A at 220 VAC 3 A at 24 VDC	0.8 A at 220 VAC 1.5 A at 24 VDC	7 A 220 VAC 7 A 24 VDC	3.5 A 220 VAC 3.5 A 24 VDC
Contact material	Ag		Ag (Au Flash)		AgCdO	
Carry current	5 A	3 A	1 A	3 A	7 A	
Max. operating voltage	250 VAC 125 VDC					
Max. operating current	5 A		1 A	3 A	7 A	
Max. switching capacity	1,100 VA 120 W	440 VA 48 W	660 VA 72 W	176 VA 36 W	1,540 VA 168 W	770 VA 84 W
Min. permissible load (see note)	Standard type: 1 mA, 5 VDC		Standard and high sensitivity types: 1 mA, 1 VDC		100 µA, 1 VDC	
	Bifurcated type: 100 µA, 1 VDC					

Non-latching – Sealed/Hermetically sealed

	Sealed, 4PDT		Hermetically sealed, 4DPT	
	Resistive load	Inductive load	Resistive load	Inductive load

Load	(p.f. = 1)	(p.f. = 0.4)	(p.f. = 1)	(p.f. = 0.4)
		(L/R = 7 ms)		(L/R = 7 ms)
Rated load	1 A at 220 VAC 1 A at 24 VDC	0.5 A at 220 VAC 0.5 A at 24 VDC	3 A at 110 VAC 3 A at 24 VDC	0.8 A at 110 VAC 1.5 A at 24 VDC
Contact material	Ag (Au Flash)			
Carry current	1 A		3 A	
Max. operating voltage	250 VAC 125 VDC		125 VAC 125 VDC	
Max. operating current	1 A		3 A	
Max. switching capacity	220 VA 24 W	110 VA 12 W	330 VA 72 W	88 VA 36 W
Min. permissible load (see note)	Standard and high sensitivity types: 1 mA, 1 VDC			
	Bifurcated type: 100 μ A, 1 VDC			

Note: P level: $\lambda 60 = 0.1 \times 10^{-6}$ /operation

■ COIL DATA

Non-latching – AC

Rated voltage (V)	Rated current (mA)		Coil resistance (Ω)	Coil inductance		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (VA, W)
				(ref. value) (H)					
	50 Hz	60 Hz		Armature OFF	Armature ON				
6	214.10	183	12.20	0.04	0.08	80% max.	30% min.	110% max.	Approx. 1.00 to 1.20
12	106.50	91	46	0.17	0.33				
24	53.80	46	180	0.69	1.30				
50	25.70	22	788	3.22	5.66				
100/110	11.70/12.90	10/11	3,750	14.54	24.60				
110/120	9.90/10.80	8.40/9.20	4,430	19.20	32.10				
200/220	6.20/6.80	5.30/5.80	12,950	54.75	94.07				
220/240	4.80/5.30	4.20/4.60	18,790	83.50	136.40				
									Approx. 0.90 to 1.10

Non-latching – DC

Rated voltage (V)	Rated current (mA)	Coil resistance (Ω)	Coil inductance		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (VA, W)
			(ref. value) (H)					
			Armature OFF	Armature ON				
6	150	40	0.17	0.33	80% max.	10% min.	110% max.	Approx. 0.90
12	75	160	0.73	1.37				
24	36.90	650	3.20	5.72				
48	18.50	2,600	10.60	21.00				
100/110	9.10/10	11,000	45.60	86.20				

Latching – AC

	Rated current (mA)		Coil resistance (Ω)	Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (VA, W)
	Set coil	Reset coil					

Rated voltage (V)	50 Hz	60 Hz	50/60 Hz	Set coil	Reset coil	(% of rated voltage)			Set coil	Reset coil
	6	146	142	68	13	32	80% max.	80% max.	110% max.	Approx. 0.60 to 0.90
12	57	56	39	72	130					
24	27.40	26.40	18.60	320	550					
50	14	13.40	3.50	1,400	3,000					
120	15.80	5.60	3.50	8,300	3,000					

Latching – DC

Rated voltage (V)	Rated current (mA)		Coil resistance (Ω)		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (VA, W)	
	Set coil	Reset coil						Set coil	Reset coil
	50/60 Hz	50/60 Hz	Set coil	Reset coil	(% of rated voltage)			Set coil	Reset coil
6	230	100	26	60	80% max.	80% max.	110% max.	Approx. 1.30	Approx. 0.06
12	110	50	110	235					
24	52	25	470	940					

- Note:
1. The rated current and coil resistance are measured at a coil temperature of 23°C (73°F) with tolerances of +15%, -20% for AC rated current, and $\pm 15\%$ for DC rated coil resistance.
 2. The AC coil resistance and inductance are reference values at 60 Hz.
 3. The performance characteristics are measured at a coil temperature of 23°C (73°F).
 4. Because the coil is designed for low power consumption, connect a bleeder (if necessary after confirming the leakage current), when the coil is driven by an SCR.
 5. For AC type latching coils, the rated current values are half-wave rectified current values measured with a DC ammeter.

■ CHARACTERISTICS

Non-latching

Contact resistance	50 m Ω max.	
Operate time	20 ms max.	
Release time	20 ms max.	
Operating frequency	Mechanically	18,000 operations/hour
	Under rated load	1,800 operations/hour
Insulation resistance	100 M Ω min. (at 500 VDC)	
Dielectric strength	Single contact type	Unsealed: 2,000 VAC, 50/60 Hz for 1 minute 1,000 VAC, 50/60 Hz for 1 minute between contacts of same polarity Sealed: 1,500 VAC, 50/60 Hz for 1 minute 1,000 VAC, 50/60 Hz for 1 minute between contacts of same polarity Hermetically sealed: 1,000 VAC, 50/60 Hz for 1 minute 700 VAC, 50/60 Hz for 1 minute between contacts of same polarity
	Bifurcated contact type	1,500 VAC, 50/60 Hz for 1 minute 1,000 VAC, 50/60 Hz for 1 minute between non-continuous contacts
Vibration	Mechanical durability	10 to 55 Hz, 1.00 mm (0.04 in) double amplitude
	Malfuction durability	10 to 55 Hz, 1.00 mm (0.04 in) double amplitude
Shock	Mechanical durability	1,000 m/s ² (approx. 100 G)
	Malfuction durability	200 m/s ² (approx. 20 G)
Ambient temperature	Operating	Unsealed: -55° to 70°C (-67° to 158°F) Sealed: -55° to 60°C (-67° to 140°F) Hermetically sealed: 25° to 60°C (77° to 140°F)
Humidity	35% to 85% RH	

Service Life	Mechanically	Single contact type: AC: 50 million operations min. (at operating frequency of 18,000 operations/hour) DC: 100 million operations min. (at operating frequency of 18,000 operations/hour)
	Mechanically	Bifurcated contact type: AC: 50 million operations min. DC: 20 million operations min. (5 million operations for the sealed/hermetically sealed types) (at operating frequency of 1,800 operations/hour)
	Electrically	See "Characteristic Data"
Weight	Sealed/unsealed: Approx. 35 g (1.23 oz) Hermetically sealed: Approx. 50 g (1.76 oz)	

Latching


Contact resistance	50 mΩ max.	
Operate time	AC: 30 ms max.; DC: 15 ms max.	
Release time	AC: 30 ms max.; DC: 15 ms max.	
Operating frequency	Mechanically	18,000 operations/hour
	Under rated load	1,800 operations/hour
Insulation resistance	100 MΩ min. (at 500 VDC)	
Dielectric strength	1,500 VAC, 50/60 Hz for 1 minute 1,000 VAC, 50/60 Hz for 1 minute between contacts of same polarity, and between set and reset coils	
Vibration	Mechanical durability	10 to 55 Hz, 1.00 mm (0.04 in) double amplitude
	Malfunction durability	10 to 55 Hz, 1.00 mm (0.04 in) double amplitude
Shock	Mechanical durability	1,000 m/s ² (approx. 100 G)
	Malfunction durability	200 m/s ² (approx. 20 G)
Ambient temperature	Operating	-55° to 70°C (-67° to 158°F)
Humidity	45% to 85% RH	
Service Life	Mechanically	100 million operations min. (at operating frequency of 18,000 operations/hour)
	Electrically	See "Characteristic Data"
Weight	Approx. 30 g (1.06 oz)	

Note: Data shown are of initial value.

■ CHARACTERISTIC DATA


Maximum switching capacity – Non-latching

MY2, MY3




Rated operating voltage (V)

MY4

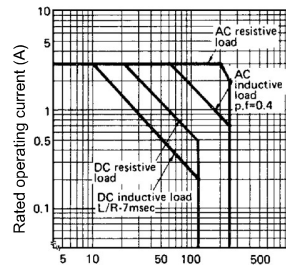


Rated operating voltage (V)

MY4(Z)H



Rated operating voltage (V)

MY4(Z)H



Rated operating voltage (V)





Electrical service life

MY2, MY3 (Resistive load)


MY2, MY3 (Inductive load)

MY4 (Resistive load)


MY4 (Inductive load)




MY4H

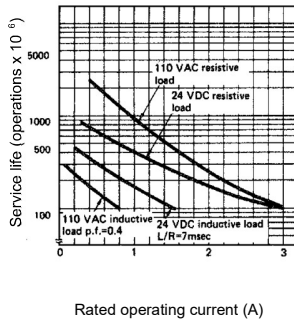


MY4Z (Resistive load)




MY4Z (Inductive load)




MYQ4



MY2-Y (Resistive load)




MY2-Y (Inductive load)



Maximum switching capacity – Latching


MY2K(-02)-US

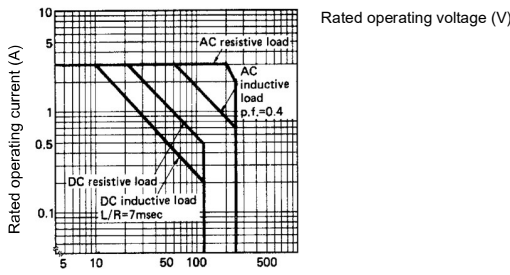


Electrical service life

MY2K(-02)-US

(Resistive load)



(Inductive load)





Dimensions



Unit: mm (inch)

RELAYS



MY2

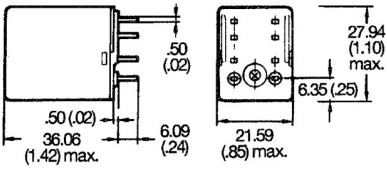


MY3

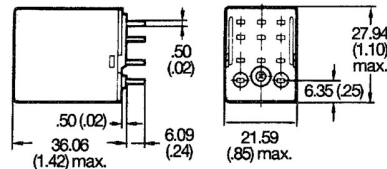


MY4

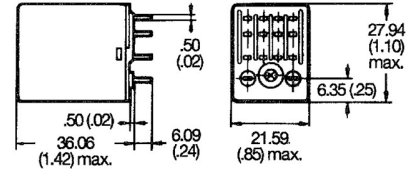


MY-02

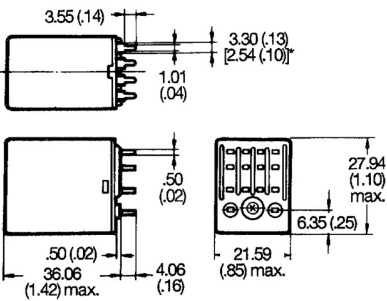


Mounting holes

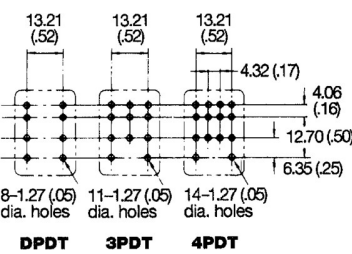

MY-F

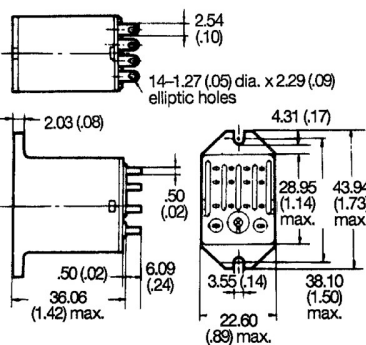


Mounting holes




Note: The above dimensioned drawing shows the 4-pole type. The dimensions of the 2- and 3-pole types are identical to the 4-pole type.

RELAYS (continued)


MY(Z)H




MY4(Z)H-0

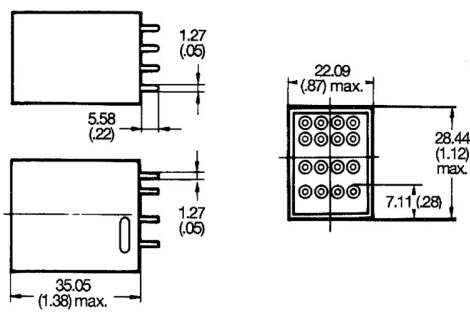


MY-5

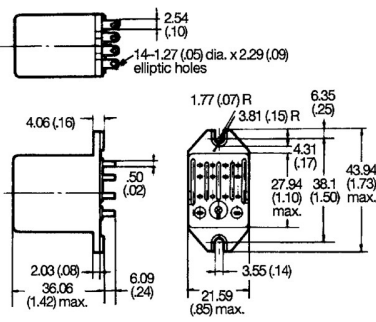

Mounting holes




Terminal arrangement (Bottom view)

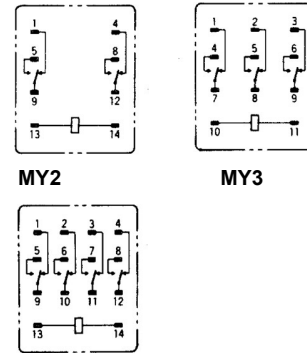


Note: The above dimensioned drawing shows the 4-pole type. The dimensions of the 2- and 3-pole types are identical the 4-pole type.

MY4, MYQ4(Z), MY4(Z)H, MY4H-0


MYQ4(Z)




MYQ4(Z)-02

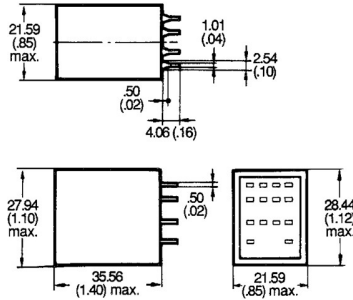


MY2K-US

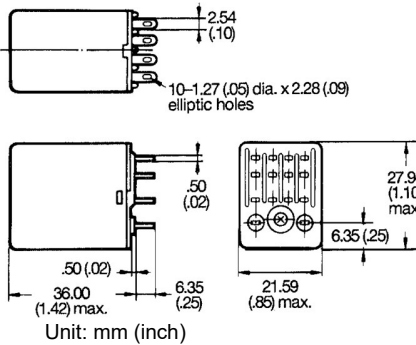

MY2K-02-US

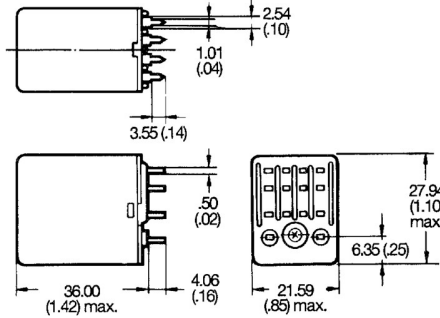

Mounting holes (Bottom view)




■ ACCESSORIES

Track mounted sockets (UL File No. E87929) (CSA Report No. LR46088) PYF08A-E
Terminal arrangement/ mounting holes

Terminal arrangement/


PYF11A

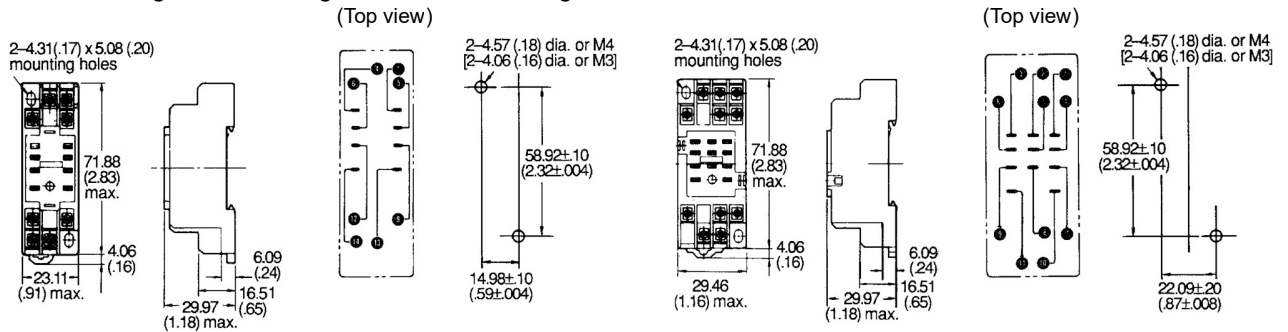

PYF14A-E

Terminal arrangement/
mounting holes

Mounting height of
relay with socket

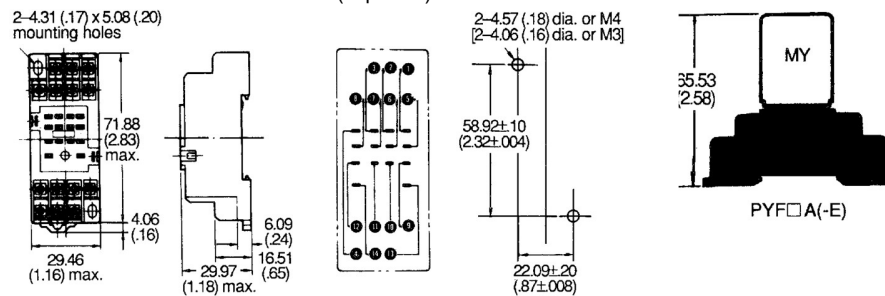


Back connecting socket (UL File No. E87929) (CSA Report No. LR46088) – DPDT


PY08-02

PY08

PY08QN

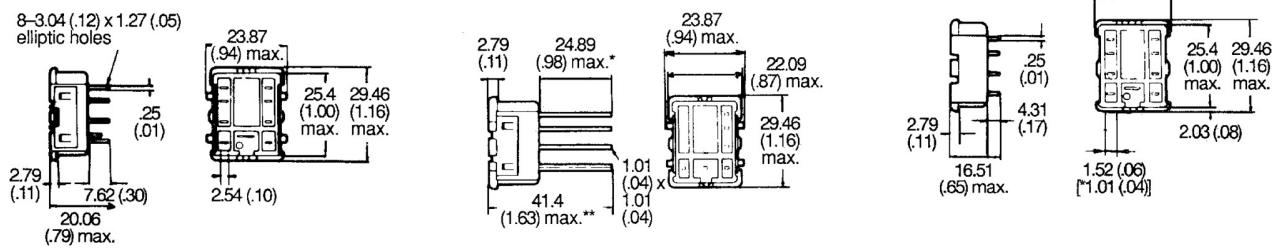


Back connecting socket (UL File No. E87929) (CSA Report No. LR46088) – 3PDT PY11 PY11QN PY11-02

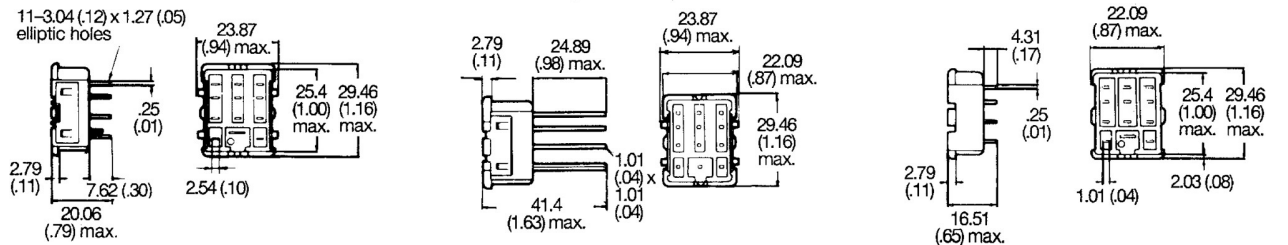


Note: 1. UL/CSA does not apply to wire wrap (Q) type sockets.
2. Value in brackets is for MY■CR.

ACCESSORIES (continued)

Back connecting socket (UL File No. E87929) (CSA Report No. LR46088) – 4PDT PY14PY14QN PY14-02

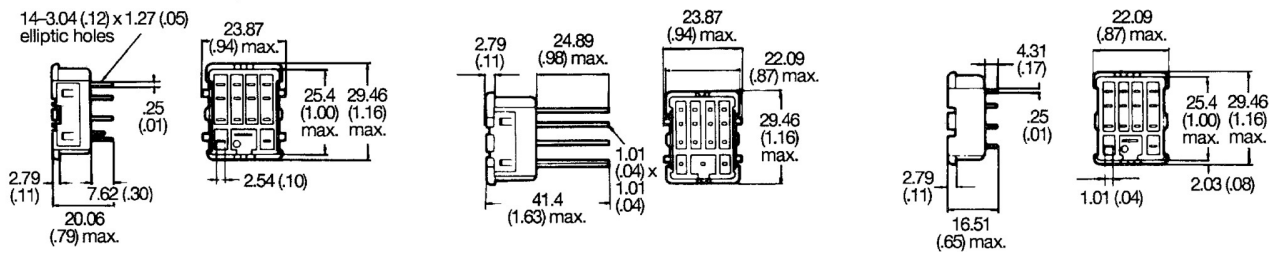

Terminal arrangement (Bottom view)

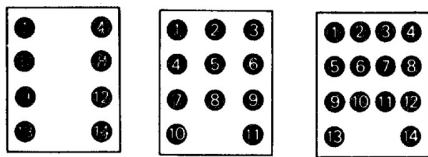


DPDT

3PDT


4PDT

Note: Value in brackets is for MY■-CR.

Panel cutout




Mounting height of relay with socket




Mounting holes


DPDT



3PDT




4PDT



* For types with suffix - 02.

Relay hold-down clip PYC-A1


for PYF■A socket




PYC-P

PYC-S

for PY■ socket





for relay mounting plates

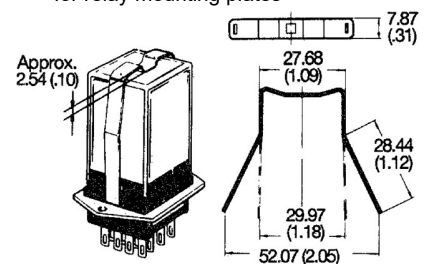



Relay hold-down clip PYC-P2 **Y92-HC PYC-1**
 for test button self-contained type with PY ■A socket

for RC circuit



for RC circuit



PFP-100N/PFP-50N mounting track

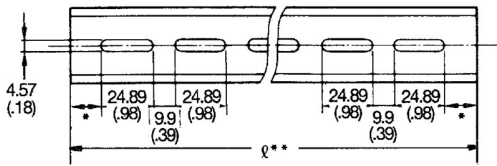

PFP-100N2 mounting track

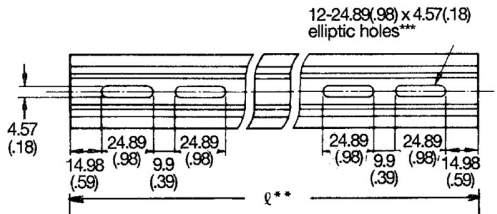

* This dimension is 14.99 mm (0.59 in) on both ends in the case of PFP-100N, but on one end in the case of PFP-50N.

** L = Length


PFP-50NL = 497.84 mm (19.60 in) PFP-

100NL = 990.60 mm (39.00 in)


PFP-100N2L = 990.60 mm (39.00 in)

*** A total of twelve 24.89 x 4.57 mm (0.98 x 0.18 in) elliptic holes are provided, with six holes cut from each end of the track at a pitch of 9.91 (0.39) between holes.

PFP-M end plate

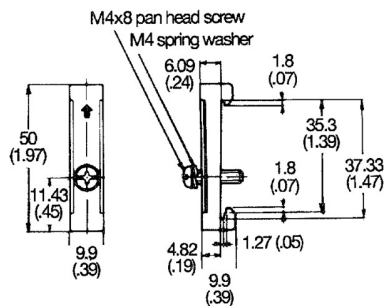

PFP-S spacer

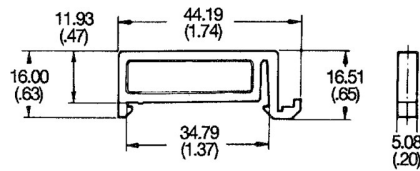


ACCESSORIES (continued)

Socket mounting plates [t=1.52 (.06)]

PYP-1



PYP-18

PYP-36



■ RELAY OPTIONS

Number of socket specs.			
Socket needed	1	18	36
PY08, PY11, PY11QN, PY14, PY4QN	PYP-1	PYP-18	PYP-36

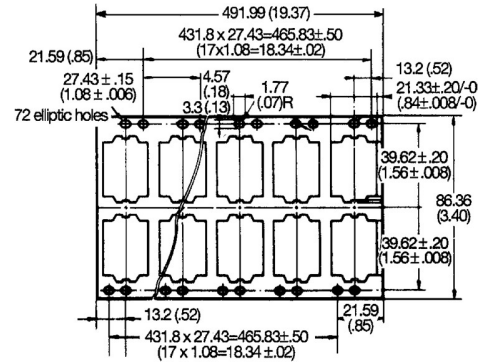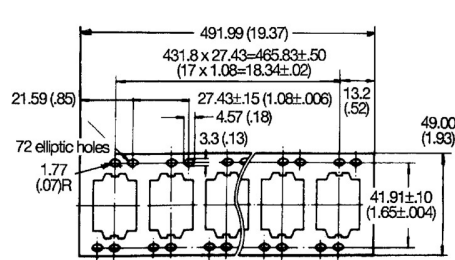

LED Indicator

Specifications and dimensions same as the standard type with the following exception. Because an LED indicator is

employed as the operation indicator, the rated current is approximately 3.8 mA higher in the DC types and 0.5 to 5 mA higher in the AC types than in the standard type.


Ambient operating temperature: -55° to 60°C (-67° to 140°F).

- Green LED DC
- Red LED AC


Terminal arrangement/Internal connections (Bottom view)

MY4N

DC coil rating type



AC coil rating type




- Note:
1. In MY2N and MY3N, only the contact circuit is different from the illustration below. The coil terminals 10 and 11 of MY3N become (-) and (+), respectively.
 2. Pay special attention to the polarities when using the DC type.
 3. The AC coil-type is provided with a self-diagnostic function that detects a breakage in the coil.

RC Circuit

Specifications and dimensions same as the standard type with the following exceptions.


The panel cutout dimensions are the same as those of the standard type. However, the height is higher by 17.02 mm (0.67 in).

**Terminal arrangement/
Internal connections
(Bottom view)**

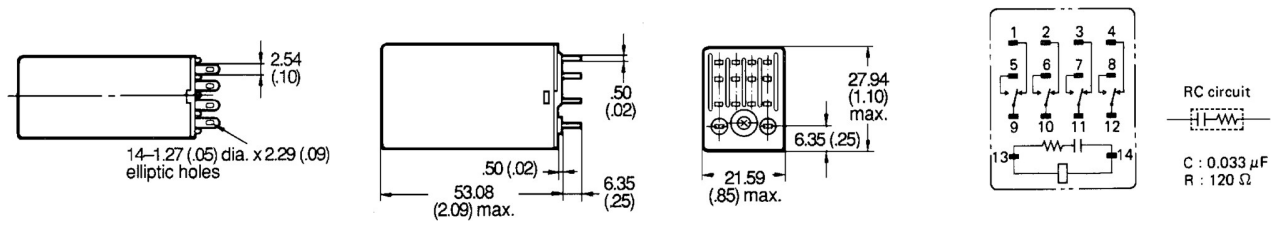


- Note: 1. The above dimensioned drawing shows the 4-pole type. The dimensions of the 2- and 3-pole types are identical to the 4-pole type.
2. Available on AC versions only.
3. Terminal arrangement/internal connections: MY2-Y is the same as the standard type; MY2N-Y is the same as the LED indicator type.

Characteristic Data Without RC circuit




With RC circuit




Push-to-test button

MY12

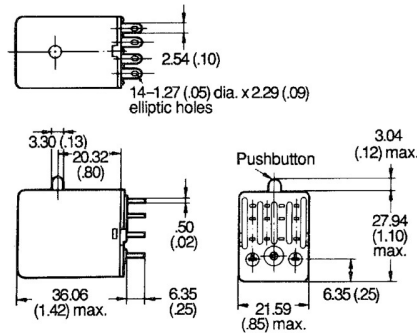

Mounting holes

When mounting the relay, use the connecting socket PYC-P2 shown in "ACCESSORIES" section. The mounting hole dimensions shown here are applicable to the relay with mounting stud.



Note: The dimension drawings show the 4-pole type. The dimensions of the 2- and 3-pole types are identical to the 4-pole type.

Diode Surge Suppression

Specifications and dimensions same as the standard with the following exceptions. **6, 12, 24, 48**


Terminal arrangement/internal connections: MY2(N)D(2) is the same as the MY4(N)-D(2) with the exception of the contact configuration.

Ambient operating temperature: -55° to 60°C (-67° to 140°F).

Terminal arrangement/Internal connections (Bottom view)


MY4-D type

100/110 VDC




MY4N-D2

6, 12, 24, 48 VDC



MY4N-D2

100/110 VDC




f 25 ms.

- Note:
1. Pay special attention to the polarities when using the DC type.
 2. The release time is somewhat longer, but satisfies the standard specifications
 3. The reverse-breakdown voltage of the diode is 1,000 VDC.
 4. Available on DC versions only.

Connecting sockets

Use the standard MY4 (4PDT) sockets with the terminal arrangements listed below.

Terminal arrangement/Internal connections (Bottom view) AC DC

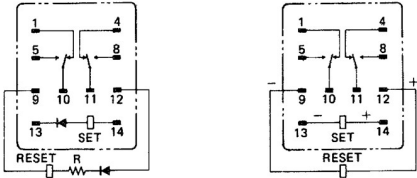

- Note:
1. R is a resistor for ampere-turn compensation, and is incorporated in the relays rated at 50 VAC or above.
 2. Pay attention to the polarity of the set and reset coils, as incorrect connection of positive and negative terminals will result in malfunctioning of the relay.

■ APPROVALS

UL recognized type (File No. E41515)

Type	Contact form	Coil ratings	Contact ratings	
MY■	DPDT	6 to 240 VAC 6 to 120 VDC	5 A, 120 VAC (Resistive)	
			5 A, 28 VDC (Resistive)	
			5 A, 240 VAC (Inductive)	
	3PDT		5 A, 28 VDC (Resistive)	
			5 A, 240 VAC (Resistive)	
			4PDT	3 A, 28 VDC (Resistive)
				3 A, 120 VAC (Inductive)
				1.5 A, 240 VAC (Inductive)
				5 A, 240 VAC (Inductive, same polarity)
				5 A, 28 VDC (Resistive, same polarity)
MY2K-■	DPDT	5 to 120 VAC 5 to 48 VDC	3 A, 240 VAC (Resistive)	
			3 A, 28 VDC (Resistive)	

CSA certified type (File No. LR31928)

Type	Contact form	Coil ratings	Contact ratings
MY■	DPDT	6 to 240 VAC 6 to 120 VDC	5 A, 28 VDC (Resistive)
			5 A, 240 VAC (Inductive)
	3PDT		3 A, 28 VDC (Resistive)
			3 A, 240 VAC (Inductive)
			5 A, 240 VAC (Inductive, same polarity)
			5 A, 28 VDC (Resistive, same polarity)
MY2K-■	DPDT	5 to 120 VAC 5 to 48 VDC	3 A, 240 VAC (General purpose)
			3 A, 30 VDC (Resistive)

LR (Lloyd's Register) approved type (File No. 563KOB-204524)

Type	Contact form	Coil ratings	Contact ratings
MY■	DPDT	6 to 240 VAC 6 to 120 VDC	2 A, 30 VDC (Inductive)
			2 A, 200 VAC (Inductive)
	4PDT		1.5 A, 30 VDC (Inductive)
			0.8 A, 200 VAC (Inductive)
			1.5 A, 115 VAC (Inductive)

SEV listed type (File No. D791/63 [2- & 4-pole], D791/91 [3-pole])

Type	Contact form	Coil ratings	Contact ratings
MY■-SV	DPDT	6 to 240 VAC	5 A, 220 VAC (Resistive)
	3PDT	6 to 110 VDC	5 A, 24 VDC (Resistive)
	4PDT		

Note: 1. The rated values approved by each of the safety standards (e.g., UL, CSA, VDE, and SEV) may be different from the performance characteristics individually defined in this catalog.
2. In the interest of product improvement, specifications are subject to change.

■ HINTS ON CORRECT USE

When using the relay rated at 120 VAC at a supply voltage of 240 connect external resistors R_s and R_r to the relay.

VAC, be sure to

