


الحمادي للإلكترونيات
ALHAMMADI FOR ELECTRONICS

**HIGHLY SENSITIVE 1500 V
FCC SURGE
WITHSTANDING MINIATURE
RELAY**

DS RELAYS

FEATURES

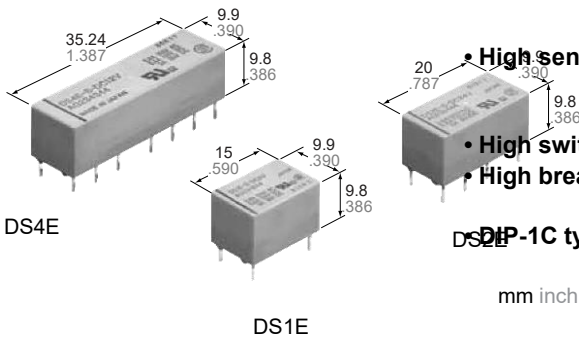

- High sensitivity: 200 mW pick-up power
100 mW pick-up power types available
- Latching types available
- High switching capacity: 60 W, 125 V A
- High breakdown voltage: 1,500 V FCC surge between open contacts
1,000 V AC between open contacts
- DIP-1C type can be used with 14 pin IC socket
2C type can be used with 16 pin IC socket,
4C type can be used with 2 sets of 14 pin IC sockets
- Gold-cap silver palladium types available for 2 Form C type • Bifurcated contacts are standard

RoHS Directive compatibility information
<http://www.nais-e.com/>

SPECIFICATIONS

Contact

Arrangement	1 Form C, 2 Form C, 4 Form C	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	50 mΩ	
Contact material	Gold-clad silver	
Rating (resistive)	Max. switching power	60 W, 125 VA
	Max. switching voltage	220 V DC, 250 V AC
	Max. switching current	2 A DC, AC
	Max. carrying current	3 A DC, AC
Expected life (min. operations)	Min. switching capacity (Reference value) ^{#1}	10 μA, 10 mV DC
	Mechanical (at 600 cpm)	10 ⁸ (1 Form C 2 coil latching type: 10 ⁷)
	Electrical 2 A 30 VDC resistive	5 × 10 ⁵


Notes:

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load. (SX relays are available for low level load switching [10V DC, 10mA max. level])

* Gold capped silver-palladium contact also available for 2 Form C 10⁷ operations at 0.1 A 50 V DC resistive

S type	2 coil latching	Nominal set and reset power	Approx. 360 mW
	Single side stable	Minimum operating power	Approx. 100 mW (128 mW)*
		Nominal operating power	Approx. 200 mW
	1 coil latching	Minimum set and reset power	Approx. 45 mW (58 mW)*
		Nominal set and reset power	Approx. 90 mW
	2 coil latching	Minimum set and reset power	Approx. 90 mW (115 mW)*
Nominal set and reset power		Approx. 180 mW	

* For 1 Form C high sensitive types.

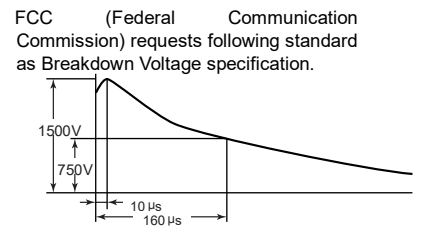

Coil (polarized) (at 20°C 68°F)

M type	Single side stable	Minimum operating power	Approx. 200 mW
		Nominal operating power	Approx. 400 mW
	1 coil latching	Minimum set and reset power	Approx. 90 mW
		Nominal set and reset power	Approx. 180 mW
	Minimum set and reset power	Approx. 180 mW	

Max. operating speed		20 cpm at rated load 50 cps at low level load	
Initial insulation resistance*1		Min. 100 MΩ (at 500 V DC)	
Initial breakdown voltage*2	Type of relay	(DS1-S type)	(Other types)
	Between open contacts	500 Vrms	1,000 Vrms
	Between contacts sets	—	1,000 Vrms
	Between contacts and coil	1,000 Vrms	1,500 Vrms
FCC surge voltage between contacts and coil		1,500 V (Expect DS1-S type)	
Operate time*3 (at nominal voltage)		Max. 10 ms	
Release time (without diode)*3 (at nominal voltage)		Max. 5 ms	
Set time*3 (at nominal voltage)		Max. 10 ms	
Reset time*3 (at nominal voltage)		Max. 10 ms	
Temperature rise (at nominal voltage, Contact current: 2A)		Max. 65°C	
Shock resistance	Functional*4	1C, 2C:Min. 490 m/s ² {50 G} 4C:Min. 294 m/s ² {30 G}	
	Destructive*5	Min. 980 m/s ² {100 G}	
Vibration resistance	Functional*6	10 to 55 Hz at double amplitude of 3.3 mm	
	Destructive	10 to 55 Hz at double amplitude of 5 mm	
Conditions for operation, transport and storage*7 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +70°C -40°F to +158°F	
	Humidity	5 to 85% R.H.	
Unit weight	1 Form C	Approx. 3.2g .11oz	
	2 Form C	Approx. 4g .14oz	
	4 Form C	Approx. 7g .25oz	

Characteristics (at 20°C 68°F)


Remarks

- * Specifications will vary with foreign standards certification ratings.
- *1 Measurement at same location as "Initial breakdown voltage" section
- *2 Detection current: 10 mA
- *3 Excluding contact bounce time
- *4 Half-wave pulse of sine wave: 11ms; detection time: 10μs
- *5 Half-wave pulse of sine wave: 6ms
- *6 Detection time: 10μs
- *7 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

TYPICAL APPLICATIONS

- Telecommunication equipment
- Office equipment
- Computer peripherals
- Security equipment
- Measuring instrumentation

ORDERING INFORMATION

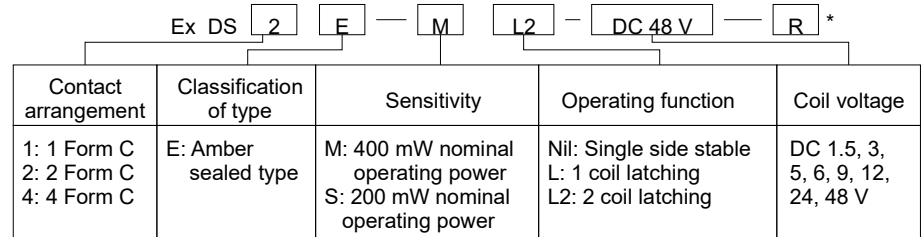

*Reverse polarity types available (add suffix-R). Standard packing: Carton: 50 pcs.; Case: 500 pcs.

TYPES

Single side stable

	Nominal Voltage, V DC	Part No.		
		1 Form C	2 Form C	4 Form C
M (400 mW) type	1.5	DS1E-M-DC1.5V	DS2E-M-DC1.5V	DS4E-M-DC1.5V
	3	DS1E-M-DC3V	DS2E-M-DC3V	DS4E-M-DC3V
	5	DS1E-M-DC5V	DS2E-M-DC5V	DS4E-M-DC5V
	6	DS1E-M-DC6V	DS2E-M-DC6V	DS4E-M-DC6V
	9	DS1E-M-DC9V	DS2E-M-DC9V	DS4E-M-DC9V
	12	DS1E-M-DC12V	DS2E-M-DC12V	DS4E-M-DC12V
	24	DS1E-M-DC24V	DS2E-M-DC24V	DS4E-M-DC24V
S (200 mW) type	1.5	DS1E-S-DC1.5V	DS2E-S-DC1.5V	DS4E-S-DC1.5V
	3	DS1E-S-DC3V	DS2E-S-DC3V	DS4E-S-DC3V
	5	DS1E-S-DC5V	DS2E-S-DC5V	DS4E-S-DC5V
	6	DS1E-S-DC6V	DS2E-S-DC6V	DS4E-S-DC6V
	9	DS1E-S-DC9V	DS2E-S-DC9V	DS4E-S-DC9V

12	DS1E-S-DC12V	DS2E-S-DC12V	DS4E-S-DC12V
24	DS1E-S-DC24V	DS2E-S-DC24V	DS4E-S-DC24V
48	DS1E-S-DC48V	DS2E-S-DC48V	DS4E-S-DC48V

1 coil latching

	Nominal Voltage, V DC	Part No.		
		1 Form C	2 Form C	4 Form C
M (180 mW) type	1.5	DS1E-ML-DC1.5V	DS2E-ML-DC1.5V	DS4E-ML-DC1.5V
	3	DS1E-ML-DC3V	DS2E-ML-DC3V	DS4E-ML-DC3V
	5	DS1E-ML-DC5V	DS2E-ML-DC5V	DS4E-ML-DC5V
	6	DS1E-ML-DC6V	DS2E-ML-DC6V	DS4E-ML-DC6V
	9	DS1E-ML-DC9V	DS2E-ML-DC9V	DS4E-ML-DC9V
	12	DS1E-ML-DC12V	DS2E-ML-DC12V	DS4E-ML-DC12V
	24	DS1E-ML-DC24V	DS2E-ML-DC24V	DS4E-ML-DC24V
S (90 mW) type	1.5	DS1E-SL-DC1.5V	DS2E-SL-DC1.5V	DS4E-SL-DC1.5V
	3	DS1E-SL-DC3V	DS2E-SL-DC3V	DS4E-SL-DC3V
	5	DS1E-SL-DC5V	DS2E-SL-DC5V	DS4E-SL-DC5V
	6	DS1E-SL-DC6V	DS2E-SL-DC6V	DS4E-SL-DC6V
	9	DS1E-SL-DC9V	DS2E-SL-DC9V	DS4E-SL-DC9V
	12	DS1E-SL-DC12V	DS2E-SL-DC12V	DS4E-SL-DC12V
	24	DS1E-SL-DC24V	DS2E-SL-DC24V	DS4E-SL-DC24V
48	DS1E-SL-DC48V	DS2E-SL-DC48V	DS4E-SL-DC48V	

2 coil latching

	Nominal Voltage, V DC	Part No.		
		1 Form C	2 Form C	4 Form C
M (360 mW) type	1.5	DS1E-ML2-DC1.5V	DS2E-ML2-DC1.5V	DS4E-ML2-DC1.5V
	3	DS1E-ML2-DC3V	DS2E-ML2-DC3V	DS4E-ML2-DC3V
	5	DS1E-ML2-DC5V	DS2E-ML2-DC5V	DS4E-ML2-DC5V
	6	DS1E-ML2-DC6V	DS2E-ML2-DC6V	DS4E-ML2-DC6V
	9	DS1E-ML2-DC9V	DS2E-ML2-DC9V	DS4E-ML2-DC9V
	12	DS1E-ML2-DC12V	DS2E-ML2-DC12V	DS4E-ML2-DC12V
	24	DS1E-ML2-DC24V	DS2E-ML2-DC24V	DS4E-ML2-DC24V
S (180 mW) type	1.5	DS1E-SL2-DC1.5V	DS2E-SL2-DC1.5V	DS4E-SL2-DC1.5V
	3	DS1E-SL2-DC3V	DS2E-SL2-DC3V	DS4E-SL2-DC3V
	5	DS1E-SL2-DC5V	DS2E-SL2-DC5V	DS4E-SL2-DC5V
	6	DS1E-SL2-DC6V	DS2E-SL2-DC6V	DS4E-SL2-DC6V
	9	DS1E-SL2-DC9V	DS2E-SL2-DC9V	DS4E-SL2-DC9V
	12	DS1E-SL2-DC12V	DS2E-SL2-DC12V	DS4E-SL2-DC12V
	24	DS1E-SL2-DC24V	DS2E-SL2-DC24V	DS4E-SL2-DC24V
48	DS1E-SL2-DC48V	DS2E-SL2-DC48V	DS4E-SL2-DC48V	

- Notes: 1. Reverse polarity types available (add suffix-R).
2. Standard packing: carton: 50 pcs.; case: 500 pcs.

DS

COIL DATA (at 20°C 68°F)

Single side stable

	Nominal voltage, V DC	Pick-up voltage, V DC (max.)		Drop-out voltage, V DC (min.)	Coil resistance, Ω ($\pm 10\%$)	Maximum allowable, V DC (at 50°C 122°F)	
		1 Form C	2, 4 Form C			1 Form C	2, 4 Form C
M type	1.5	1.05	1.05	0.15	5.63	1.8	2.25
	3	2.1	2.1	0.3	22.5	3.6	4.5
	5	3.5	3.5	0.5	62.5	6	7.5
	6	4.2	4.2	0.6	90	7.2	9
	9	6.3	6.3	0.9	203	10.8	13.5
	12	8.4	8.4	1.2	360	14.4	18
	24	16.8	16.8	2.4	1440	28.8	36
	48	33.6	33.6	4.8	5760	57.6	72

S type	1.5	1.2	1.05	0.15	11.3	2.4	3
	3	2.4	2.1	0.3	45	4.8	6
	5	4.0	3.5	0.5	125	8.0	10
	6	4.8	4.2	0.6	180	9.6	12
	9	7.2	6.3	0.9	405	14.4	18
	12	9.6	8.4	1.2	720	19.2	24
	24	19.2	16.8	2.4	2880	38.4	48
	48	38.4	33.6	4.8	11520	76.8	96

1 coil latching


	Nominal voltage, V DC	Reset Set, V DC (max.)		Coil resistance, Ω ($\pm 10\%$)		Maximum allowable, V DC (at 50°C 122°F)	
		1 Form C	2, 4 Form C			1 Form C	2, 4 Form C
M type	1.5	1.05	1.05	12.5		1.8	2.25
	3	2.1	2.1	50		3.6	4.5
	5	3.5	3.5	139		6	7.5
	6	4.2	4.2	200		7.2	9
	9	6.3	6.3	450		10.8	13.5
	12	8.4	8.4	800		14.4	18
	24	16.8	16.8	3200		28.8	36
	48	33.6	33.6	12800		57.6	72
S type	1.5	1.2	1.05	25		2.4	3
	3	2.4	2.1	100		4.8	6
	5	4.0	3.5	278		8.0	10
	6	4.8	4.2	400		9.6	12
	9	7.2	6.3	900		14.4	18
	12	9.6	8.4	1600		19.2	24
	24	19.2	16.8	6400		38.4	48
	48	38.4	33.6	25600		76.8	96

2 coil latching

	Nominal voltage, V DC	Reset Set, V DC (max.)		Coil resistance, Ω ($\pm 10\%$)		Maximum allowable, V DC (at 50°C 122°F)	
		1 Form C	2,4 Form C	Coil I	Coil II	1 Form C	2,4 Form C
M type	1.5	1.05	1.05	6.25		1.8	2.25
	3	2.1	2.1	25		3.6	4.5
	5	3.5	3.5	69.4		6	7.5
	6	4.2	4.2	100		7.2	9
	9	6.3	6.3	225		10.8	13.5
	12	8.4	8.4	400		14.4	18
	24	16.8	16.8	1600		28.8	36
	48	33.6	33.6	6400		57.6	72
S type	1.5	1.2	1.05	12.5		2.4	3
	3	2.4	2.1	50		4.8	6
	5	4.0	3.5	139		8.0	10
	6	4.8	4.2	200		9.6	12
	9	7.2	6.3	450		14.4	18
	12	9.6	8.4	800		19.2	24
	24	19.2	16.8	3200		38.4	48
	48	38.4	33.6	12800		76.8	96


DIMENSIONS**1 Form C**

Single side stable, 1 coil latching, 2 coil latching

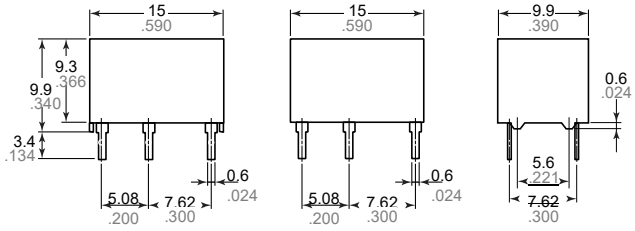

General tolerance: $\pm 0.3 \pm .012$


PC board pattern (Copper-side view)
Single side stable, 1 coil latching 2 coil latching

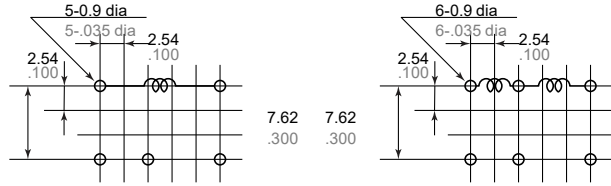

Tolerance: $\pm 0.1 \pm .004$


Schematic (Bottom view)
Single side stable
Deenergized condition

1 coil latching

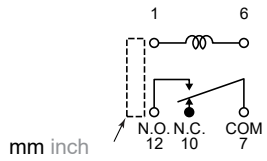


mm inch

* A polarity bar showing the relay direction can replace the schematic.



2 coil latching




SET RST COM
12 10 7

Diagram shows the "reset" position when terminals 1 and 6 are energized.
Energize with reverse polarity to transfer contacts.


Diagram shows the "reset" position when terminals 3 and 6 are energized.
Energize terminals 1 and 3 to transfer contacts.

2 Form C

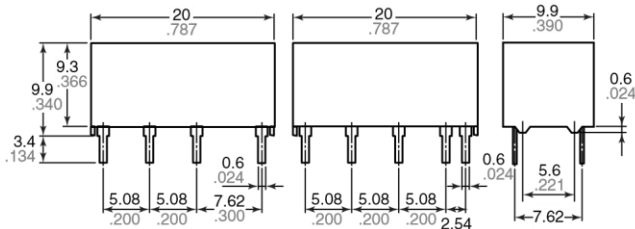


General tolerance: $\pm 0.3 \pm .012$

PC board pattern (Copper-side view)
Single side stable, 1 coil latching 2 coil latching

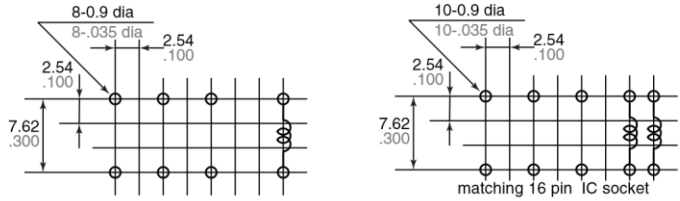

Single side stable, 1 coil latching, 2 coil latching
Schematic (Bottom view)
Single side stable
Deenergized condition

1 coil latching



* A polarity bar showing the relay direction can replace the schematic.




Diagram shows the "reset" position when terminals 1 and 16 are energized.
Energize with reverse polarity to transfer contacts.

Tolerance: $\pm 0.1 \pm .004$

2 coil latching






Diagram shows the "reset" position when terminals 2 and 15 are energized.
Energize terminals 1 and 16 to transfer contacts.

4 Form C

Single side stable, 1 coil latching, 2 coil latching

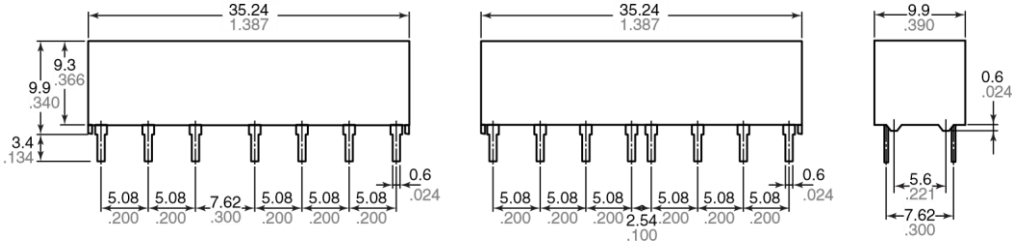


PC board pattern (Copper-side view)
Single side stable, 1 coil latching

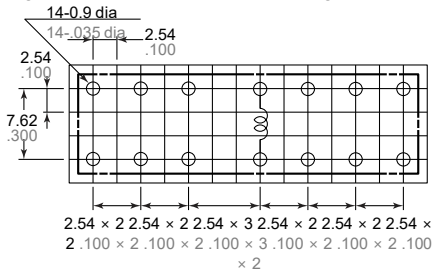


General tolerance: $\pm 0.3 \pm .012$

2 coil latching

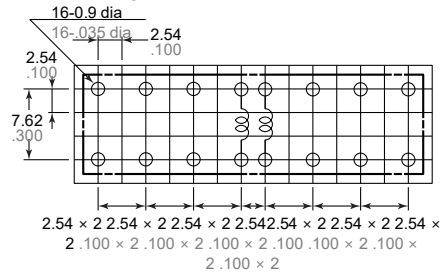


Schematic (Bottom view)
Single side stable
Deenergized condition

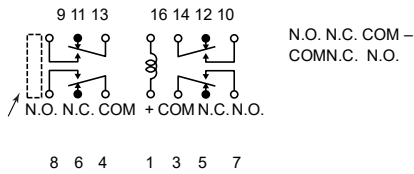


A polarity bar showing the relay direction Diagram shows the "reset" position when terminals 1 can replace the schematic, and 16 are energized.

1 coil latching

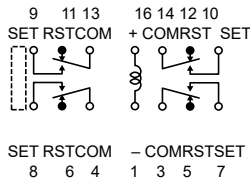

Energize with reverse polarity to transfer contacts.

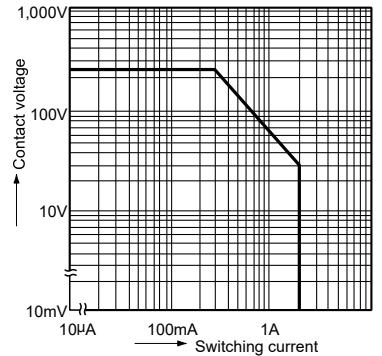

2 coil latching


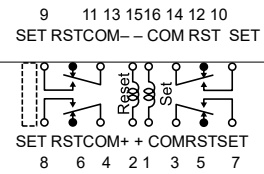


Diagram shows the "reset" position when terminals 2 and 15 are energized. Energize terminals 1 and 16 to transfer contacts.

REFERENCE DATA


- Maximum switching capacity
- Life curve (Resistive load)

3. Contact reliability for AC loads
Sample: DS2E-M-DC24V 10 pcs. Cycle rate: 20 cpm. Detection level: 200 mΩ

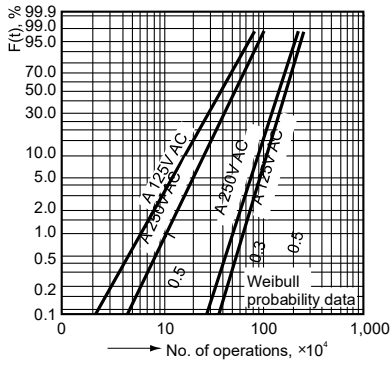


4-(1). Coil temperature rise
(2 Form C single side stable type)

Tested sample: DS2E-M-DC12V
Point measured: Inside the coil
Ambient temperature: 18° to 19°C 64° to 66°F

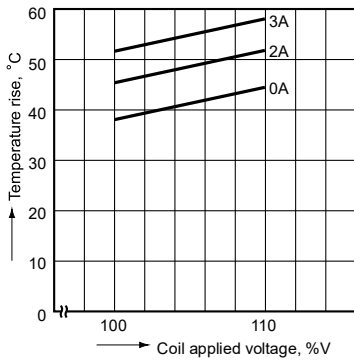


4-(2). Coil temperature rise
(4 Form C single side stable type)

Tested sample: DS4E-M-DC12V
Point measured: Inside the coil
Ambient temperature: 17° to 18°C 63° to 64°F

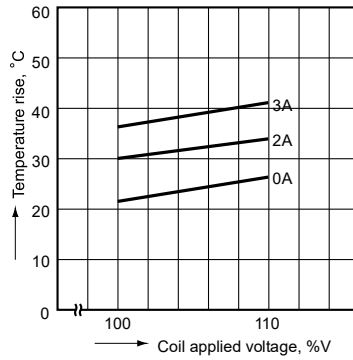


4-(3). Coil temperature rise
(2 Form C 2 coil latching type)

Tested sample: DS2E-ML2-DC12V
Point measured: Inside the coil
Ambient temperature: 20° to 21°C 68° to 70°F

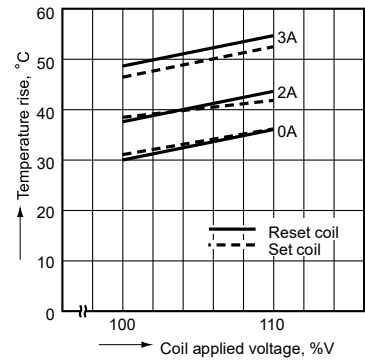


4-(4). Coil temperature rise
(4 Form C 2 coil latching type)

Tested sample: DS4E-ML2-DC12V
Point measured: Inside the coil
Ambient temperature: 20°C 68°F

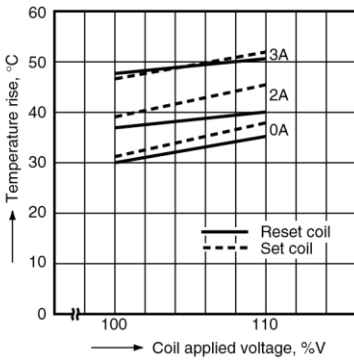


5. Operate and release time characteristics
(2 Form C single side stable type)

Test condition: Without diode connected to coil in parallel

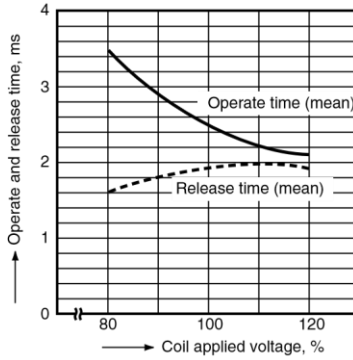




6-(1). Influence of adjacent mounting
(1 Form C)

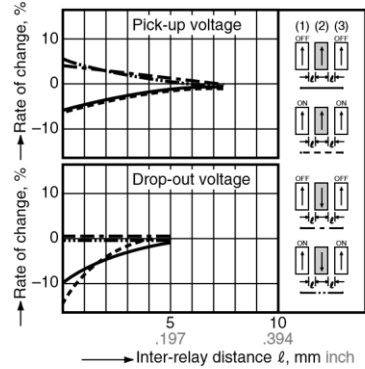

6-(2). Influence of adjacent mounting
(2 Form C)

6-(3). Influence of adjacent mounting
(4 Form C)

DS

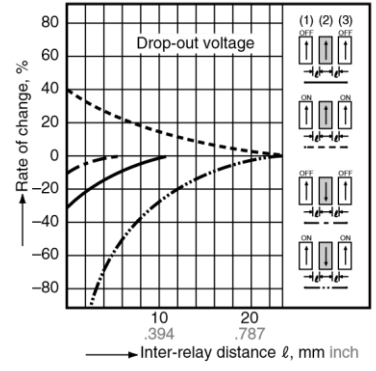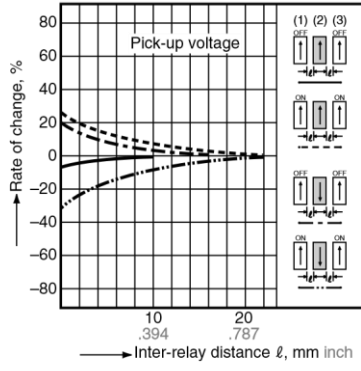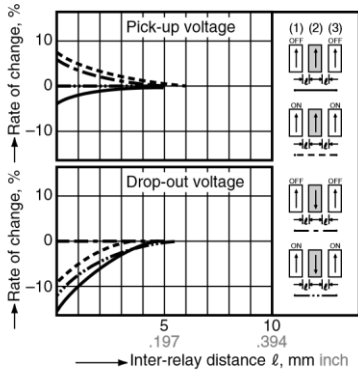

For Cautions for Use, see Relay Technical Information.